Data sheet
L-9518-0013-01-E

RENISHAW
apply innovation™

RESOLUTE™ absolute optical encoder system



- True-absolute non-contact optical encoder system: no batteries required
- Wide set-up tolerances for quick and easy installation
- High immunity to dirt, scratches and light oils
- Resolutions to 1 nm linear or 32 bit rotary
- 100 m/s maximum speed for all resolutions (up to 36 000 rev/min)
- ±40 nm sub-divisional error for smooth velocity control
- Less than 10 nm RMS jitter for improved positional stability
- Built-in separate position-checking algorithm provides inherent safety
- IP64 sealed readhead for high reliability in harsh environments
- Integral set-up LED enables easy installation and provides diagnostics at a glance
- Operates up to 80 °C
- Integral over-temperature alarm
- Compatible with a wide range of linear, rotary, and partial arc scales

RESOLUTE™ is a true-absolute fine-pitch optical encoder system with excellent metrology performance.

Patented RESOLUTE encoder technology combines 1 nm resolution with exceptionally high speed, reading from a range of high-accuracy linear tape and spar scales or angle encoder rings.

RESOLUTE encoder systems use a single optical absolute track with a nominal pitch of 30 µm, combined with sophisticated optics. This ensures wide set-up tolerances, very low sub-divisional error and ultra-low noise (jitter), resulting in better velocity control performance and rock solid positional stability.

The RESOLUTE system ensures reliability with excellent dirt immunity, built-in separate position-checking algorithm and IP64 sealed readhead with wipe-clean recovery.

RESOLUTE encoders are available with BiSS C (unidirectional), FANUC, Mitsubishi, Panasonic, Siemens DRIVE-CLiQ and Yaskawa serial interfaces.

www.renishaw.com/resolutedownloads


#renishaw

System features

Unique single-track absolute optical scale




- Absolute position is determined immediately upon switch-on
- No battery back-up
- No yaw de-phasing unlike multiple-track systems
- Fine pitch (30 µm nominal period) optical scale for superior motion control compared to inductive, magnetic or other non-contact optical absolute encoders
- High-accuracy graduations marked directly onto tough engineering materials for outstanding metrology and reliability

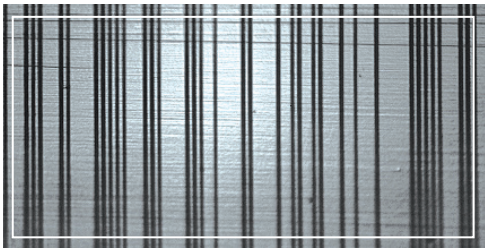


High dirt immunity

- Advanced optics and embedded surplus code means the RESOLUTE encoder system even reads dirty scale
- Absolute position can be determined in all three cases shown here; clean scale (left), grease contamination (below-left), particle contamination (below)

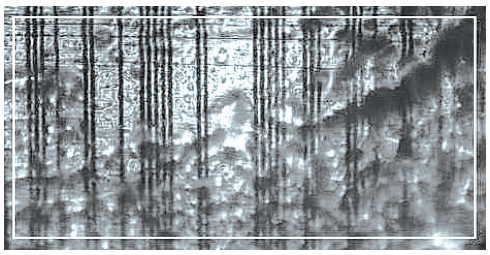



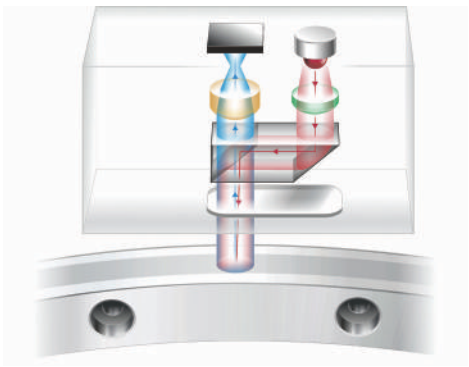

Unique detection method


- Readhead acts like an ultra-fast miniature digital camera, taking photos of a coded scale
- Photos are analysed by a high-speed digital signal processor (DSP) to determine absolute position
- Built-in position-check algorithm constantly monitors calculations for ultimate safety and reliability
- Advanced optics and position determination algorithms are designed to provide low noise (jitter < 10 nm RMS) and low sub-divisional error (SDE ±40 nm)

Optional Advanced Diagnostic Tool

The RESOLUTE encoder system is compatible with the Advanced Diagnostic Tool ADTa-100 [1] and ADT View software, which acquire detailed real-time data from the readhead to allow easy set-up, optimisation and in-field fault finding.

The intuitive software interface provides:

- Digital readout of encoder position and signal strength
- Graph of signal strength over the entire axis travel
- Ability to set a new zero position for the encoder system
- System configuration information

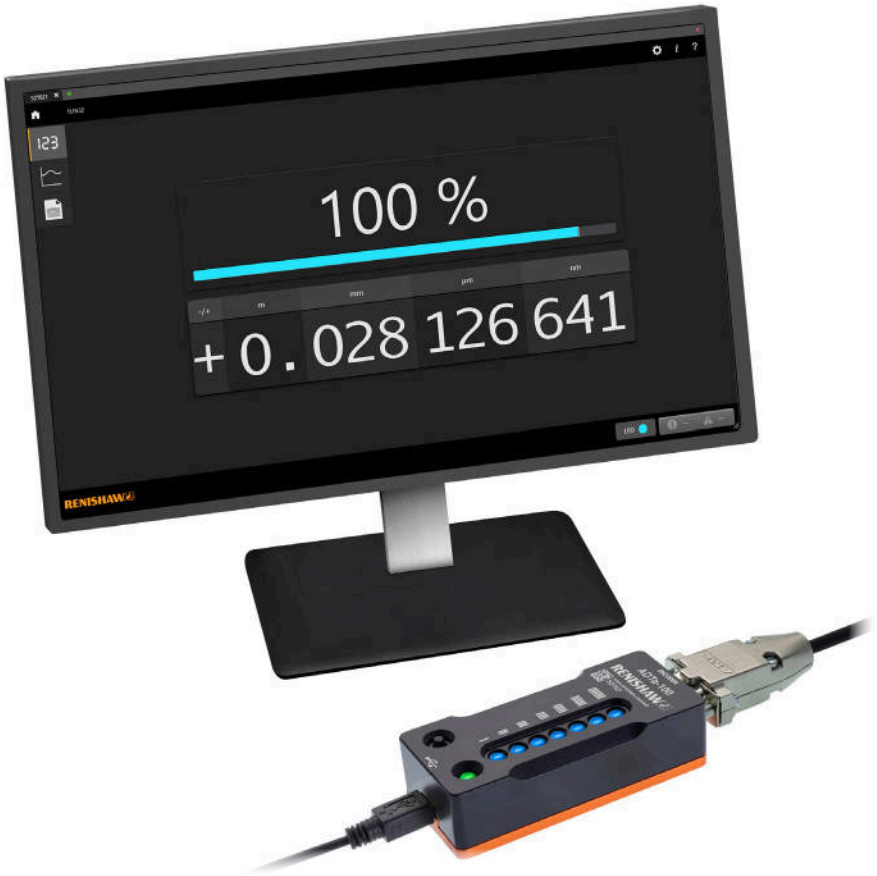

[1] ADTa-100 compatible readheads are marked with the symbol ADT

RESOLUTE serial interfaces

RESOLUTE readheads are available in a range of serial interfaces:

Linear readheads

	Readhead type			
Serial interfaces	**Standard**	**Ultra-high vacuum (UHV) [1]**	**Extended temperature range (ETR) [1]**	**Functional safety (FS) [1]**
BiSS C (unidirectional)	✔	✔	✔	-
BiSS Safety	-	-	-	✔
FANUC	✔	-	-	-
Mitsubishi	✔	-	-	-
Panasonic	✔	✔	-	-
Siemens DRIVE-CLiQ	✔	-	-	✔
Yaskawa	✔	-	-	-

Rotary readheads


	Readhead type		
Serial interfaces	**Standard**	**Ultra-high vacuum (UHV) [1]**	**Functional safety (FS) [1]**
BiSS C (unidirectional)	✔	✔	-
BiSS Safety	-	-	✔
FANUC	✔	-	-
Mitsubishi	✔	-	-
Panasonic	✔	✔	-
Siemens DRIVE-CLiQ	✔	-	✔
Yaskawa	✔	-	-

Partial arc readheads

	Readhead type
Serial interfaces	**Standard**
BiSS C (unidirectional)	✔
FANUC	✔
Mitsubishi	✔
Panasonic	✔
Siemens DRIVE-CLiQ	✔
Yaskawa	✔

[1] Separate data sheets are available for ETR, UHV and Functional Safety RESOLUTE readheads at www.renishaw.com/resolutedownloads.

Compatible linear scales

	RTLA30-S [1]	RTLA30 (with *FASTRACK*™ carrier)
	Self-adhesive mounted stainless steel tape scale	**Stainless steel tape scale and self-adhesive mounted carrier**
		
Form (height × width)	0.4 mm × 8 mm including adhesive	RTLA30 scale: 0.2 mm × 8 mm *FASTRACK* carrier: 0.4 mm × 18 mm including adhesive
Accuracy (at 20 °C)	±5 µm/m	±5 µm/m
Maximum length [2]	21 m	RTLA30 lengths up to 21 m *FASTRACK* carrier lengths up to 25 m
Coefficient of thermal expansion (at 20 °C)	10.1 ±0.2 µm/m/°C	10.1 ±0.2 µm/m/°C

	RKLA30-S
	Self-adhesive mounted stainless steel tape scale
	
Form (height × width)	0.15 mm × 6 mm including adhesive
Accuracy (at 20 °C)	±5 µm/m
Maximum length [2]	21 m
Coefficient of thermal expansion (at 20 °C)	Matches that of substrate material when scale ends fixed by epoxy mounted end clamps

	RELA30	RSLA30
	Self-adhesive or clip/clamp mounted low-expansion ZeroMet™ spar scale	**Self-adhesive or clip/clamp mounted stainless steel spar scale**
		
Form (height × width)	1.6 mm × 14.9 mm	1.5 mm × 14.9 mm
Accuracy (at 20 °C)	Up to 1 m : ±1 µm 1 m to 1.7 m : ±1 µm/m	Up to 1 m : ±1.5 µm 1 m to 2 m : ±2.25 µm 2 m to 3 m: ±3 µm 3 m to 5 m : ±4 µm
Maximum length [2]	1.7 m	5 m
Coefficient of thermal expansion (at 20 °C)	0.75 ±0.35 µm/m/°C	10.1 ±0.2 µm/m/°C

[1] For RTLA30-S axis lengths > 2 m, the *FASTRACK* carrier with RTLA30 is recommended.

[2] The maximum scale length may be limited for some serial interfaces and resolutions; refer to 'Resolution and scale lengths' on page 7 for details.

For more information about the linear scales refer to the relevant absolute scale data sheet which can be downloaded from **www.renishaw.com/resolutedownloads**.

Compatible rotary scales

	RESA30	REXA30
	303/304 stainless steel ring	Ultra-high accuracy 303/304 stainless steel ring
		
Accuracy (at 20 °C)	±1.9 arc second (Typical installed accuracy for a 550 mm diameter ring) [1]	±1 arc second [2] (Total installed accuracy for ring diameters ≥ 100 mm)
Ring diameters	52 mm to 550 mm	52 mm to 417 mm
Coefficient of thermal expansion (at 20 °C)	15.5 ±0.5 µm/m/°C	15.5 ±0.5 µm/m/°C

Compatible partial arc scales

	RKLA30-S
	Self-adhesive mounted stainless steel tape scale
	
Form (height × width)	0.15 mm × 6 mm including adhesive
Accuracy (at 20 °C)	±5 µm/m
Maximum length [3]	21 m
Coefficient of thermal expansion (at 20 °C)	10.1 ±0.2 µm/m/°C
Minimum arc radius [4]	50 mm

1 'Typical' installations are a result of graduation and installation errors combining and, to some magnitude, cancelling.

2 Accuracy when using two RESOLUTE readheads. For the accuracy value of ring diameters < 100 mm, see *REXA30 ultra-high accuracy absolute angle encoder* data sheet (Renishaw part no. L-9517-9405).

3 The maximum scale length may be limited for some serial interfaces and resolutions; refer to 'Resolution and scale lengths' on page 7 for details.

4 For smaller radii, contact your local Renishaw representative.

For more information about the rotary scales refer to the relevant absolute scale data sheet which can be downloaded from **www.renishaw.com/resolutedownloads**.

Linear/partial arc encoder system

Resolution and scale lengths

The maximum scale length depends upon the serial interface, readhead resolution and the number of position bits.

The table below shows the maximum scale length for each system:

		Resolution			
Serial interfaces	**Position bits**	**1 nm**	**5 nm**	**50 nm**	**100 nm**
BiSS C (unidirectional)	26 bit	67 mm	336 mm	3.355 m	-
	32 bit	4.295 m	21 m	21 m	-
	36 bit	21 m	21 m	21 m	-
FANUC	37 bit	21 m	-	21 m	-
Mitsubishi	40 bit	2.1 m	-	21 m	-
Panasonic	48 bit	21 m	-	21 m	21 m
Siemens DRIVE-CLiQ	28 bit	-	-	13.42 m	-
	34 bit	17.18 m	-	-	-
Yaskawa	36 bit	1.8 m	-	21 m	-

Speed

The table below shows the maximum speed for each system:

		Resolution			
Serial interfaces	**Position bits**	**1 nm**	**5 nm**	**50 nm**	**100 nm**
BiSS C (unidirectional)	26 bit	100 m/s	100 m/s	100 m/s	-
	32 bit	100 m/s	100 m/s	100 m/s	-
	36 bit	100 m/s	100 m/s	100 m/s	-
FANUC	37 bit	100 m/s	-	100 m/s	-
Mitsubishi	40 bit	100 m/s	-	100 m/s	-
Panasonic	48 bit (when used with A5 series)	0.4 m/s	-	20 m/s	40 m/s
	48 bit (when used with A6 series)	4 m/s	-	100 m/s	100 m/s
Siemens DRIVE-CLiQ	28 bit	-	-	100 m/s	-
	34 bit	100 m/s	-	-	-
Yaskawa	36 bit	3.6 m/s	-	100 m/s	-

Angle encoder system

Resolution

RESOLUTE angle encoders are available with a variety of resolutions, dependent upon the serial interface being used.

All ring sizes are available for all serial interfaces and resolutions

Serial interfaces		Resolution	Counts per revolution	Arc second
BiSS C (unidirectional)		18 bit	262 144	≈ 4.94
		26 bit	67 108 864	≈ 0.019
		32 bit	4 294 967 296	≈ 0.0003
FANUC		27 bit	134 217 728	≈ 0.0097
		31 bit	2 147 483 648	≈ 0.0006
Mitsubishi		23 bit	8 388 608	≈ 0.15
		27 bit	134 217 728	≈ 0.0097
Panasonic		23 bit	8 388 608	≈ 0.15
		32 bit	4 294 967 296	≈ 0.0003
Siemens DRIVE-CLiQ		26 bit	67 108 864	≈ 0.019
		29 bit	536 870 912	≈ 0.0024
Yaskawa	Rotary servomotors	24 bit	16 777 216	≈ 0.077
	Full closed loop control	23 bit	8 388 608	≈ 0.15
		26 bit	67 108 864	≈ 0.019
		30 bit	1 073 741 824	≈ 0.0012

NOTE: 32 bit resolution is below the noise floor of the RESOLUTE encoder.

Angle absolute encoder

Speed and accuracy

The table below shows the maximum speed and typical installed accuracy for RESOLUTE readheads with standard diameter RESA30 rings.

RESA30 diameter (mm)	Maximum reading speed (rev/min)						Typical installed accuracy [1] (arc second)
	BiSS, FANUC, Mitsubishi, Siemens DRIVE-CLiQ	Panasonic	Yaskawa				
			23 bit	24 bit	26 bit	30 bit	
52	36 000	7 200 [2]	14 600	14 600	3 250	203	±12.7
57	33 000	7 200 [2]	14 600	14 600	3 250	203	±11.8
75	25 000	7 200 [2]	14 600	14 600	3 250	203	±9.5
100	19 000	7 200 [2]	14 600	14 600	3 250	203	±7.5
101	19 000	7 200 [2]	14 600	14 600	3 250	203	±7.5
103	18 500	7 200 [2]	14 600	14 600	3 250	203	±7.4
104	18 000	7 200 [2]	14 600	14 600	3 250	203	±7.3
115	16 500	6 600	14 600	14 600	3 250	203	±6.8
124	15 000	6 100	14 600	14 600	3 250	203	±6.3
150	12 000	5 000	12 000	12 000	3 250	203	±5.5
165	11 500	4 600	11 500	11 500	3 250	203	±7.0
172	11 000	4 400	11 000	11 000	3 250	203	±5.0
183	10 400	4 200	10 400	10 400	3 250	203	±4.7
200	9 500	3 800	9 500	9 500	3 250	203	±4.3
206	9 200	3 700	9 200	9 200	3 250	203	±4.2
209	9 000	3 600	9 000	9 000	3 250	203	±4.2
229	8 300	3 300	8 300	8 300	3 250	203	±3.9
255	7 400	2 900	7 400	7 400	3 250	203	±3.6
280	6 800	2 700	6 800	6 800	3 250	203	±3.4
300	6 300	2 500	6 300	6 300	3 250	203	±3.1
330	5 700	2 300	5 700	5 700	3 250	203	±2.9
350	5 400	2 100	5 400	5 400	3 250	203	±2.8
413	4 600	1 840	4 600	4 600	3 250	203	±2.4
417	4 500	1 800	4 500	4 500	3 250	203	±2.4
489	3 900	1 500	3 900	3 900	3 250	203	±2.1
550	3 400	1 300	3 400	3 400	3 250	203	±1.9

CAUTION: Very high speed motion axes require additional design consideration. For applications that will exceed 50% of the rated maximum reading speed of the ring, contact your local Renishaw representative.

For REXA30 speed and accuracy figures, refer to the *REXA30 ultra-high accuracy absolute angle encoder* data sheet (Renishaw part no. L-9517-9405).

[1] 'Typical' installations are a result of graduation and installation errors combining and, to some magnitude, cancelling.

[2] The maximum speed depends on the driver, motor and mechanical components. Contact Renishaw or Panasonic regarding the maximum speed.

General specifications

		BiSS C (undirectional), FANUC, Mitsubishi, Panasonic and Yaskawa	Siemens DRIVE-CLiQ [1]
Power supply		5 V ±10% 1.25 W maximum (250 mA @ 5 V) [2] Ripple: 200 mVpp maximum @ frequency up to 500 kHz maximum	Single readhead system: 3.05 W maximum (readhead: 1.25 W + single input interface: 1.8 W). Dual readhead system: 4.3 W maximum (2 × readheads: 1.25 W each + dual input interface: 1.8 W). 24 V power is provided by the DRIVE-CLiQ network. Ripple: 200 mVpp maximum @ frequency up to 500 kHz maximum
Temperature	Storage	–20 °C to +80 °C	–20 °C to +70 °C
	Installation	+20 °C ±5 °C	+20 °C ±5 °C
	Operating	0 °C to +80 °C	0 °C to +80 °C (readhead) 0 °C to +55 °C (interface)
Humidity		95% relative humidity (non-condensing) to IEC 60068-2-78	
Sealing		IP64	IP64 (readhead) IP67 (interface)
Acceleration	Operating	500 m/s², 3 axes (readhead only)	
Maximum acceleration of scale with respect to readhead [3]		2000 m/s²	
Vibration	Operating	Sinusoidal 300 m/s², 55 Hz to 2000 Hz, 3 axes	Sinusoidal 300 m/s², 55 Hz to 2000 Hz, 3 axes (readhead) Sinusoidal 100 m/s², 55 Hz to 2000 Hz, 3 axes (interface)
Shock	Non-operating	1000 m/s², 6 ms, ½ sine, 3 axes	
Mass	Readhead	18 g	18 g
	Readhead cable	32 g/m	32 g/m
	Interface	-	218 g
EMC compliance		IEC 61800-5-2 Annex E	
Readhead cable		7 core, tinned and annealed copper, 28 AWG Single-shielded, outside diameter 4.7 ±0.2 mm Flex life > 40 × 10⁶ cycles at 20 mm bend radius UL recognised component	
Maximum readhead cable length		10 m	10 m (to controller or interface) (refer to Siemens DRIVE-CLiQ specifications for maximum cable length from interface to controller)

CAUTION: The RESOLUTE encoder system has been designed to the relevant EMC standards, but must be correctly integrated to achieve EMC compliance. In particular, attention to shielding arrangements is essential.

NOTE: For Extended Temperature Range (ETR), Ultra-high vacuum (UHV), and Functional Safety RESOLUTE readhead specifications refer to the relevant data sheets which can be downloaded from **www.renishaw.com/resolutedownloads**.

1 RESOLUTE Siemens DRIVE-CLiQ readheads require the Siemens DRIVE-CLiQ interface to function correctly.


2 Current consumption figures refer to terminated RESOLUTE systems. Renishaw encoder systems must be powered from a 5 Vdc supply complying with the requirements for SELV of standard IEC 60950-1.

3 This is the worst case figure that is correct for the slowest communications clock rates. For faster clock rates, the maximum acceleration of scale with respect to the readhead can be higher. For more details, contact your local Renishaw representative.

RESOLUTE readhead installation drawing

Dimensions and tolerances in mm



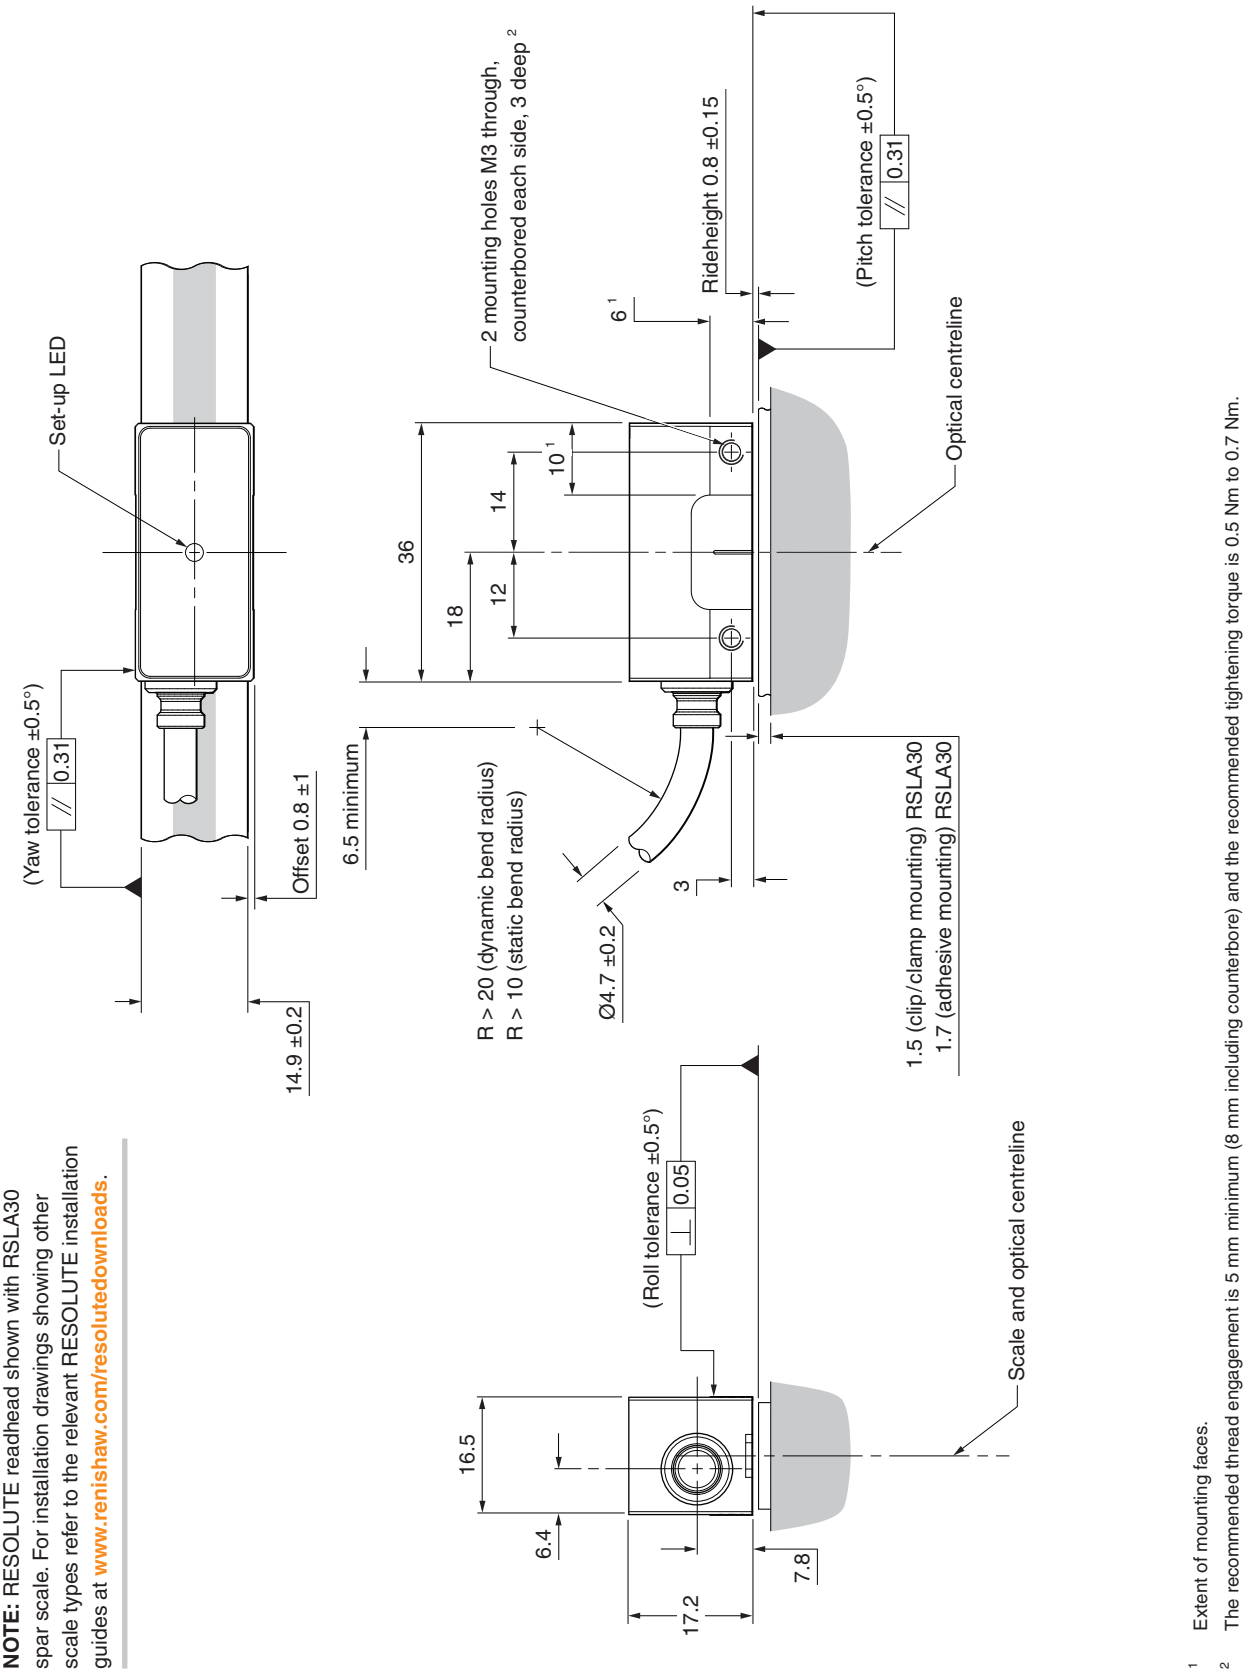


NOTE: RESOLUTE readhead shown with RSLA30 spar scale. For installation drawings showing other scale types refer to the relevant RESOLUTE installation guides at **www.renishaw.com/resolutedownloads**.

[1] Extent of mounting faces.

[2] The recommended thread engagement is 5 mm minimum (8 mm including counterbore) and the recommended tightening torque is 0.5 Nm to 0.7 Nm.

RESOLUTE side exit cable readhead installation drawing

Dimensions and tolerances in mm

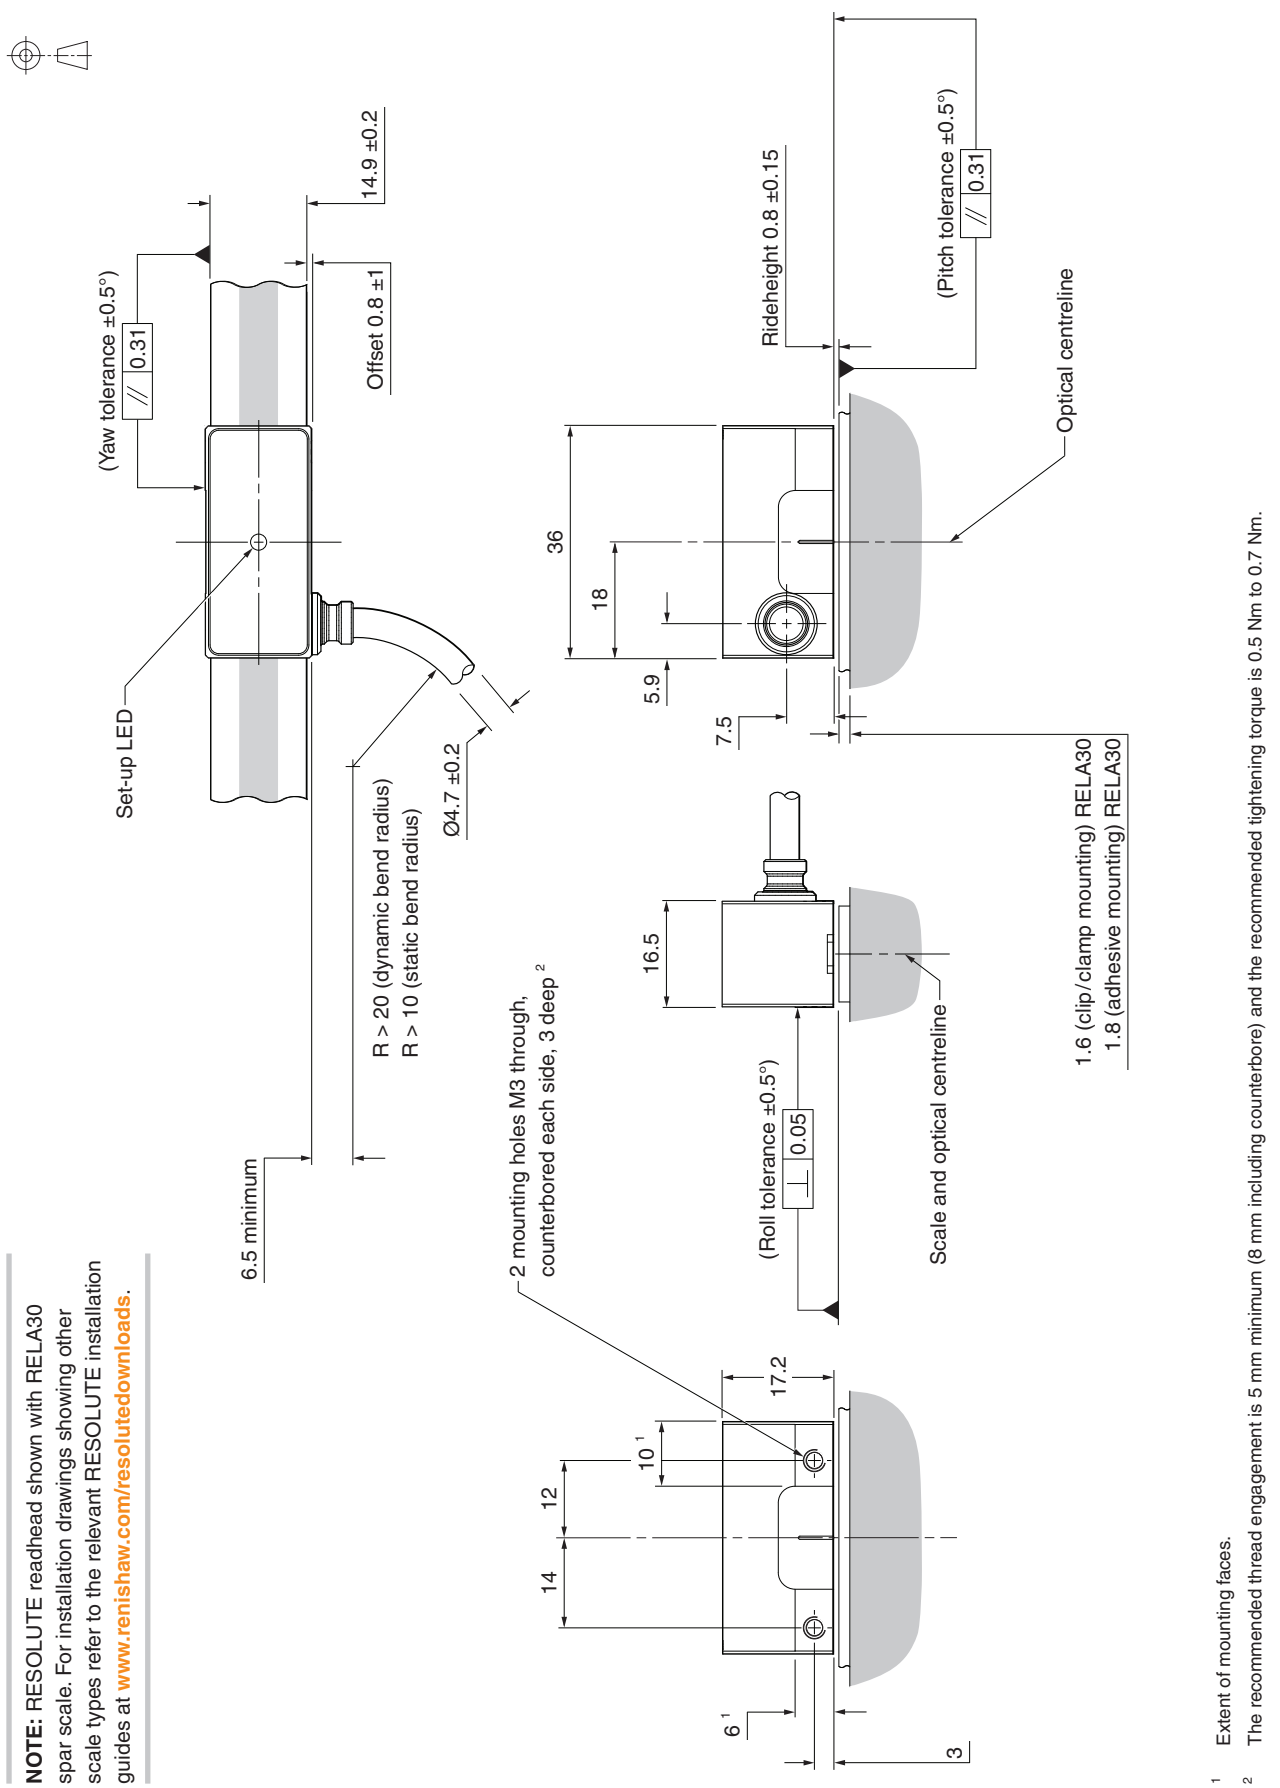

NOTE: RESOLUTE readhead shown with RELA30 spar scale. For installation drawings showing other scale types refer to the relevant RESOLUTE installation guides at **www.renishaw.com/resolutedownloads**.


[1] Extent of mounting faces.

[2] The recommended thread engagement is 5 mm minimum (8 mm including counterbore) and the recommended tightening torque is 0.5 Nm to 0.7 Nm.

Siemens DRIVE-CLiQ interface drawing

Dimensions and tolerances in mm

Single readhead input (A-9796-0575)

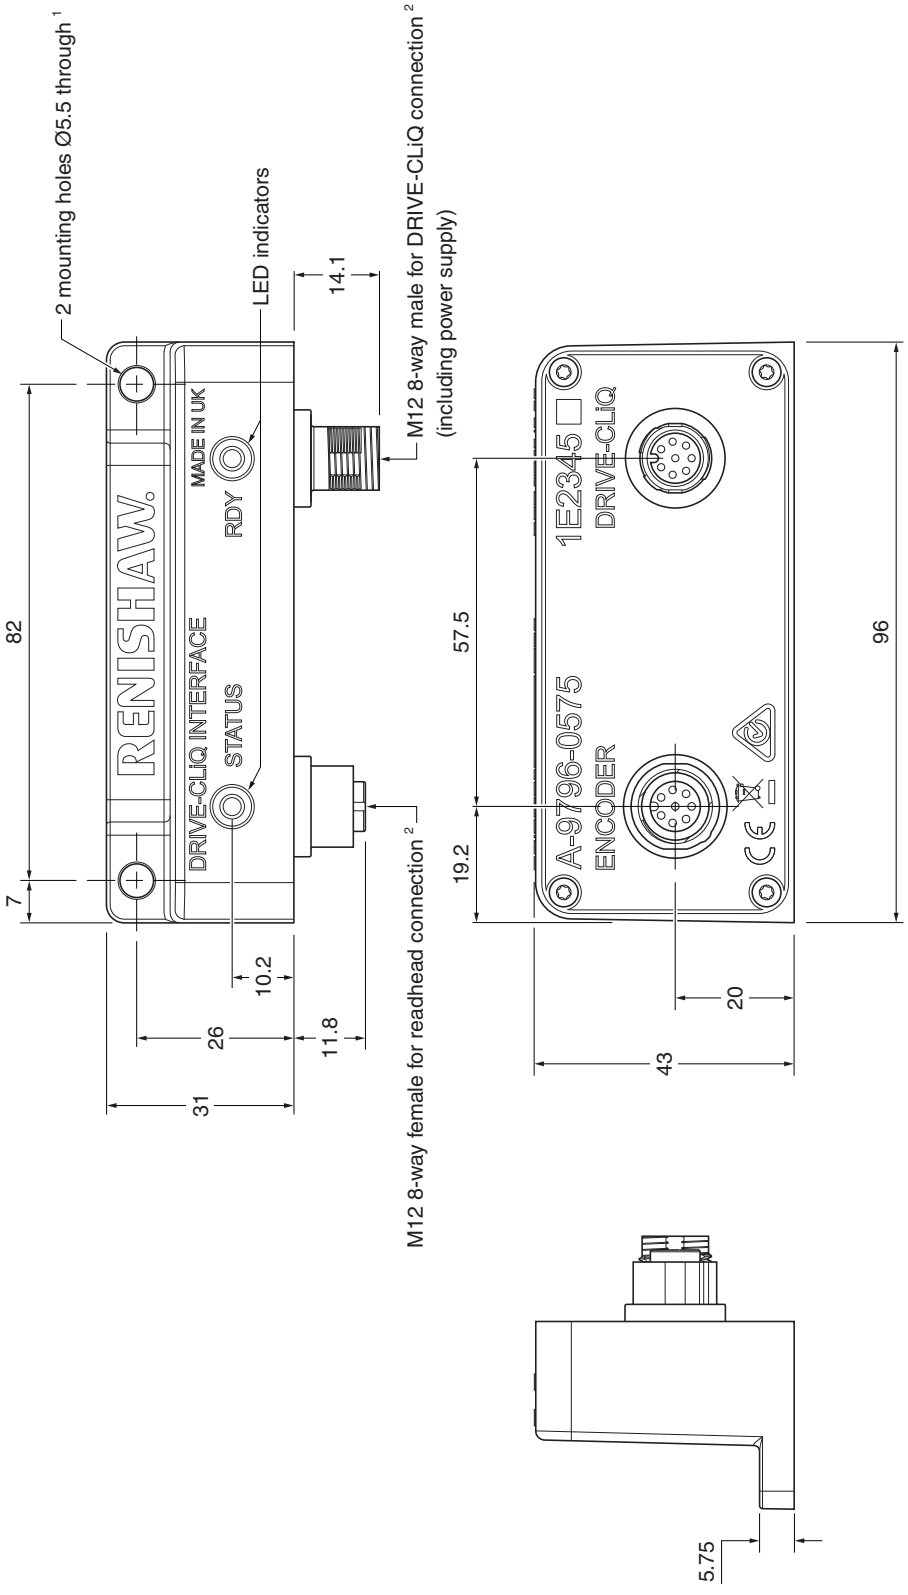

NOTE: RESOLUTE Siemens DRIVE-CLiQ readheads require the Siemens DRIVE-CLiQ interface to function correctly.


[1] Screw grade: ISO 4762-M5. Maximum tightening torque 4 Nm. Recommended thread engagement ≥ 5 mm.

[2] Maximum tightening torque 4 Nm.

Siemens DRIVE-CLiQ interface drawing

Dimensions and tolerances in mm

Dual readhead input (A-9796-0590)

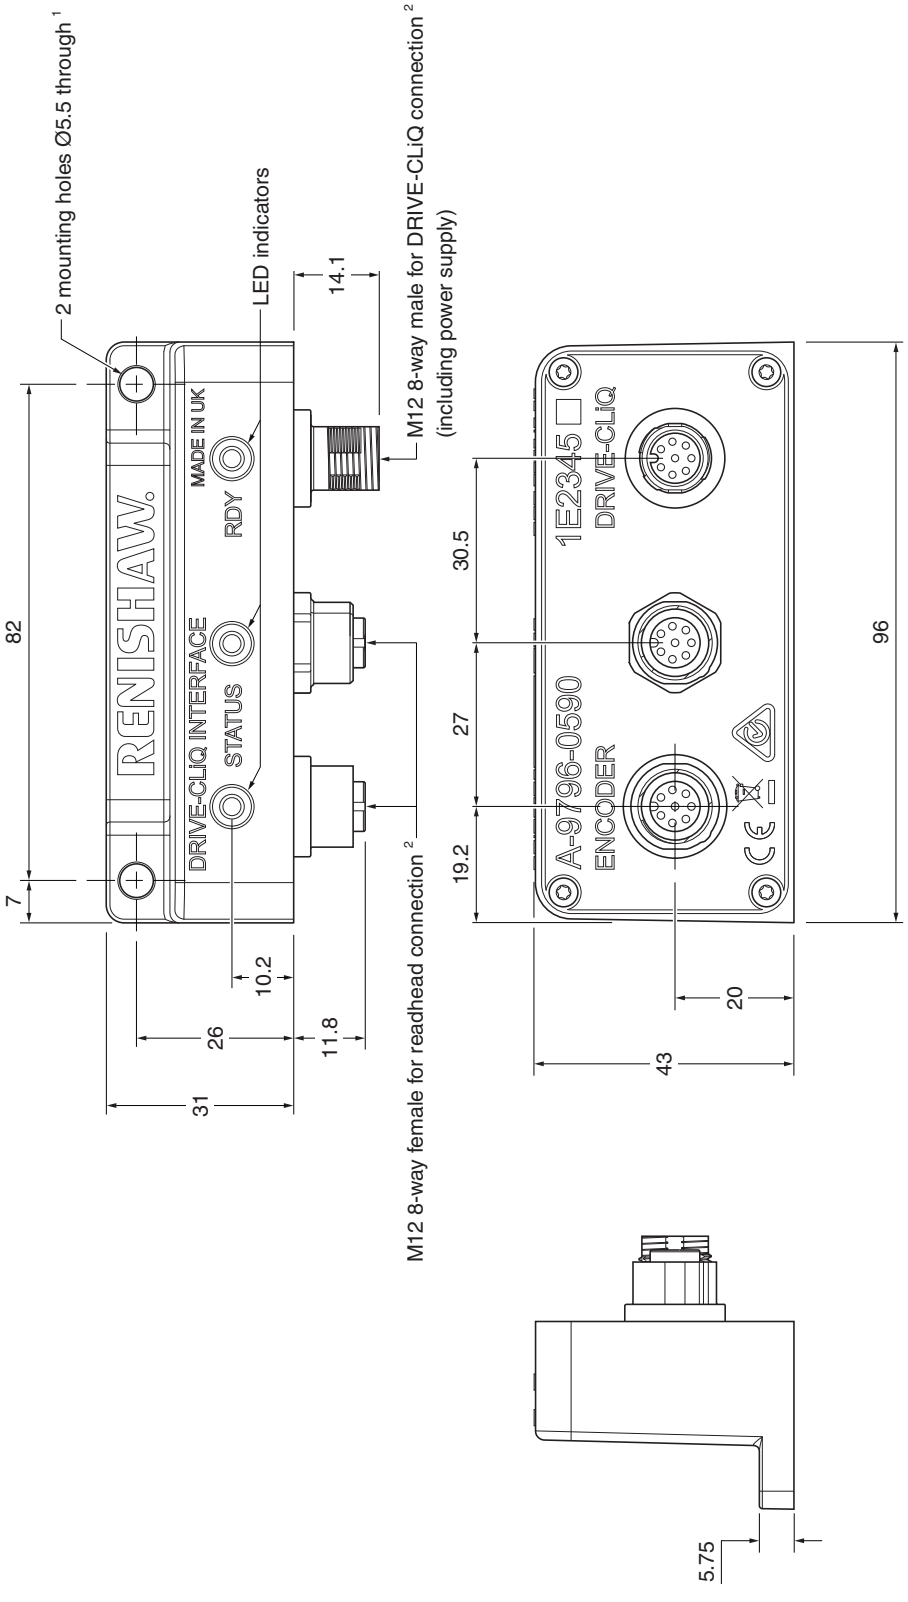

NOTE: RESOLUTE Siemens DRIVE-CLiQ readheads require the Siemens DRIVE-CLiQ interface to function correctly.

1 Screw grade: ISO 4762-M5. Maximum tightening torque 4 Nm. Recommended thread engagement ≥ 5 mm.

2 Maximum tightening torque 4 Nm.

RESOLUTE BiSS readhead part numbers

Linear and partial arc readheads

R L 32B B T 001 E 30 A

Series

R = RESOLUTE

Scale form

L = Linear/partial arc [1]

Serial interface

26B = BiSS 26 bit

32B = BiSS 32 bit

36B = BiSS 36 bit

Mechanical option

B = Standard cable outlet

R = Side cable outlet

Gain option

T = RTLA30 / RTLA30-S / RKLA30-S scales (scale code option 'B' or 'E' only)

S = RSLA30 scale (scale code option 'C' only)

E = RELA30 scale (scale code option 'C' or 'D' only)

Resolution

001 = 1 nm

005 = 5 nm

050 = 50 nm

Scale code option [2]

B = RTLA30 / RTLA30-S / RKLA30-S [1] (20 mm to 10 m scale length)

C = RSLA30 (20 mm to 5 m scale length) / RELA30 (> 1.13 m to 1.7 m scale length)

D = RELA30 (20 mm to 1.13 m scale length)

E = RTLA30 / RTLA30-S / RKLA30-S [1] (> 10 m to 21 m scale length)

Cable length

02 = 0.2 metres	15 = 1.5 metres	90 = 9.0 metres
05 = 0.5 metres	30 = 3.0 metres	99 = 10.0 metres
10 = 1.0 metres	50 = 5.0 metres	

Cable termination

A = 9-way D-type connector

F = Flying lead (unterminated cable)

L = LEMO in-line connector

S = M12 (sealed) connector

For RESOLUTE BiSS UHV and Functional Safety linear readhead part numbers see the relevant data sheet at **www.renishaw.com/resolutedownloads**.

Valid system configurations (readheads and scale) can be checked at **www.renishaw.com/epc**.

1 For partial arc choose scale code option 'B' or 'E' as only RKLA30-S scale can be used in partial arc systems.

2 The maximum scale length may be limited for some serial interfaces and resolutions; refer to 'Resolution and scale lengths' on page 7 for details.

RESOLUTE BiSS readhead part numbers

Rotary readheads

R A 32B B A 052 B 30 A

Series

R = RESOLUTE

Scale form

A = Angular

Serial interface

18B = BiSS 18 bit
26B = BiSS 26 bit
32B = BiSS 32 bit

Mechanical option

B = Standard cable outlet
R = Side cable outlet

Gain option

A = Standard

Ring diameter

052 = 52 mm	150 = 150 mm	280 = 280 mm (RESA30 only)
057 = 57 mm	165 = 165 mm	300 = 300 mm
075 = 75 mm	172 = 172 mm	330 = 330 mm (RESA30 only)
100 = 100 mm	183 = 183 mm	350 = 350 mm
101 = 101 mm (RESA30 only)	200 = 200 mm	413 = 413 mm (RESA30 only)
103 = 103 mm	206 = 206 mm	417 = 417 mm
104 = 104 mm	209 = 209 mm	489 = 489 mm (RESA30 only)
115 = 115 mm	229 = 229 mm	550 = 550 mm (RESA30 only)
124 = 124 mm (RESA30 only)	255 = 255 mm	

Scale code option

B = Standard scale code

Cable length

02 = 0.2 metres	15 = 1.5 metres	90 = 9.0 metres
05 = 0.5 metres	30 = 3.0 metres	99 = 10.0 metres
10 = 1.0 metres	50 = 5.0 metres	

Cable termination

A = 9-way D-type connector
F = Flying lead (unterminated cable)
L = LEMO in-line connector
S = M12 (sealed) connector

For RESOLUTE BiSS ETR, UHV and Functional Safety rotary readhead part numbers see the relevant data sheet at **www.renishaw.com/resolutedownloads**.

Valid system configurations (readheads and scale) can be checked at **www.renishaw.com/epc**.

RESOLUTE FANUC readhead part numbers

Linear and partial arc readheads

R L 37F B S 001 C 30 A

Series

R = RESOLUTE

Scale form

L = Linear/partial arc [1]

Serial interface

37F = FANUC α and α*i* (37 bit)

Mechanical option

B = Standard cable outlet

R = Side cable outlet

Gain option

T = RTLA30 / RTLA30-S / RKLA30-S scales (scale code option 'B' or 'E' only)

S = RSLA30 scale (scale code option 'C' only)

E = RELA30 scale (scale code option 'C' or 'D' only)

Resolution

001 = 1 nm

050 = 50 nm

Scale code option

B = RTLA30 / RTLA30-S / RKLA30-S [1] (20 mm to 10 m scale length)

C = RSLA30 (20 mm to 5 m scale length) / RELA30 (> 1.13 m to 1.7 m scale length)

D = RELA30 (20 mm to 1.13 m scale length)

E = RTLA30 / RTLA30-S / RKLA30-S [1] (> 10 m to 21 m scale length)

Cable length

02 = 0.2 metres	15 = 1.5 metres	90 = 9.0 metres
05 = 0.5 metres	30 = 3.0 metres	99 = 10.0 metres
10 = 1.0 metres	50 = 5.0 metres	

Cable termination

A = 9-way D-type connector

F = Flying lead (unterminated cable)

H = 20-way FANUC compatible connector

L = LEMO in-line connector

S = M12 (sealed) connector

Valid system configurations (readheads and scale) can be checked at **www.renishaw.com/epc**.

[1] For partial arc choose scale code option 'B' or 'E' as only RKLA30-S scale can be used in partial arc systems.

RESOLUTE FANUC readhead part numbers

Rotary readheads

R A 27F B A 052 B 30 A

Series

R = RESOLUTE

Scale form

A = Angular

Serial interface

27F = FANUC α High Type B and αi (27 bit)

31F = FANUC αi (31 bit)

Mechanical option

B = Standard cable outlet

R = Side cable outlet

Gain option

A = Standard

Ring diameter

052 = 52 mm	150 = 150 mm	280 = 280 mm (RESA30 only)
057 = 57 mm	165 = 165 mm	300 = 300 mm
075 = 75 mm	172 = 172 mm	330 = 330 mm (RESA30 only)
100 = 100 mm	183 = 183 mm	350 = 350 mm
101 = 101 mm (RESA30 only)	200 = 200 mm	413 = 413 mm (RESA30 only)
103 = 103 mm	206 = 206 mm	417 = 417 mm
104 = 104 mm	209 = 209 mm	489 = 489 mm (RESA30 only)
115 = 115 mm	229 = 229 mm	550 = 550 mm (RESA30 only)
124 = 124 mm (RESA30 only)	255 = 255 mm	

Scale code option

B = Standard scale code

Cable length

02 = 0.2 metres	15 = 1.5 metres	90 = 9.0 metres
05 = 0.5 metres	30 = 3.0 metres	99 = 10.0 metres
10 = 1.0 metres	50 = 5.0 metres	

Cable termination

A = 9-way D-type connector

F = Flying lead (unterminated cable)

H = 20-way FANUC compatible connector

L = LEMO in-line connector

S = M12 (sealed) connector

Valid system configurations (readheads and scale) can be checked at www.renishaw.com/epc.

RESOLUTE Mitsubishi readhead part numbers

Linear and partial arc readheads

R L 40M B S 001 C 30 N

Series

R = RESOLUTE

Scale form

L = Linear/partial arc [1]

Serial interface

40M = Mitsubishi 40 bit, 2 wire [2]

40N = Mitsubishi 40 bit, 4 wire [3]

Mechanical option

B = Standard cable outlet

R = Side cable outlet

Gain option

T = RTLA30 / RTLA30-S / RKLA30-S scales (scale code option 'B' or 'E' only)

S = RSLA30 scale (scale code option 'C' only)

E = RELA30 scale (scale code option 'C' or 'D' only)

Resolution

001 = 1 nm

050 = 50 nm

Scale code option

B = RTLA30 / RTLA30-S / RKLA30-S [1] (20 mm to 10 m scale length)

C = RSLA30 (20 mm to 5 m scale length) / RELA30 (> 1.13 m to 1.7 m scale length)

D = RELA30 (20 mm to 1.13 m scale length)

E = RTLA30 / RTLA30-S / RKLA30-S [1] (> 10 m to 21 m scale length)

Cable length

02 = 0.2 metres	15 = 1.5 metres	90 = 9.0 metres
05 = 0.5 metres	30 = 3.0 metres	99 = 10.0 metres
10 = 1.0 metres	50 = 5.0 metres	

Cable termination

A = 9-way D-type connector

F = Flying lead (unterminated cable)

L = LEMO in-line connector

N = 15-way D-type connector for Mitsubishi

P = 10-way Mitsubishi connector

S = M12 (sealed) connector

For more information about Mitsubishi drives, contact Mitsubishi.

Valid system configurations (readheads and scale) can be checked at **www.renishaw.com/epc**.

[1] For partial arc choose scale code option 'B' or 'E' as only RKLA30-S scale can be used in partial arc systems.

[2] 2 wire: MR-J4 series/MR-J5 series

[3] 4 wire: MDS-D2/DH2/DM2/DJ

RESOLUTE Mitsubishi readhead part numbers

Rotary readheads

R A 23M B A 052 B 30 N

Series

R = RESOLUTE

Scale form

A = Angular

Serial interface

23M = Mitsubishi 23 bit, 2 wire [1]

23N = Mitsubishi 23 bit, 4 wire [2]

27N = Mitsubishi 27 bit, 4 wire [2]

Mechanical option

B = Standard cable outlet

R = Side cable outlet

Gain option

A = Standard

Ring diameter

052 = 52 mm
057 = 57 mm
075 = 75 mm
100 = 100 mm
101 = 101 mm (RESA30 only)
103 = 103 mm
104 = 104 mm
115 = 115 mm
124 = 124 mm (RESA30 only)
150 = 150 mm
165 = 165 mm
172 = 172 mm
183 = 183 mm
200 = 200 mm
206 = 206 mm
209 = 209 mm
229 = 229 mm
255 = 255 mm
280 = 280 mm (RESA30 only)
300 = 300 mm
330 = 330 mm (RESA30 only)
350 = 350 mm
413 = 413 mm (RESA30 only)
417 = 417 mm
489 = 489 mm (RESA30 only)
550 = 550 mm (RESA30 only)

Scale code option

B = Standard scale code

Cable length

02 = 0.2 metres
05 = 0.5 metres
10 = 1.0 metres
15 = 1.5 metres
30 = 3.0 metres
50 = 5.0 metres
90 = 9.0 metres
99 = 10.0 metres

Cable termination

A = 9-way D-type connector
F = Flying lead (unterminated cable)
L = LEMO in-line connector
N = 15-way D-type connector for Mitsubishi
P = 10-way Mitsubishi connector
S = M12 (sealed) connector

[1] 2 wire: MR-J4 series

[2] 4 wire: MDS-D2/DH2/DM2/DJ

For more information about Mitsubishi drives, contact Mitsubishi.

Valid system configurations (readheads and scale) can be checked at www.renishaw.com/epc.

RESOLUTE Panasonic readhead part numbers

Linear and partial arc readheads

R L 48P B S 001 C 30 A

Series

R = RESOLUTE

Scale form

L = Linear/partial arc [1]

Serial interface

48P = Panasonic 48 bit

Mechanical option

B = Standard cable outlet

R = Side cable outlet

Gain option

T = RTLA30 / RTLA30-S / RKLA30-S scales (scale code option 'B' or 'E' only)

S = RSLA30 scale (scale code option 'C' only)

E = RELA30 scale (scale code option 'C' or 'D' only)

Resolution

001 = 1 nm

050 = 50 nm

100 = 100 nm

Scale code option

B = RTLA30 / RTLA30-S / RKLA30-S [1] (20 mm to 10 m scale length)

C = RSLA30 (20 mm to 5 m scale length) / RELA30 (> 1.13 m to 1.7 m scale length)

D = RELA30 (20 mm to 1.13 m scale length)

E = RTLA30 / RTLA30-S / RKLA30-S [1] (> 10 m to 21 m scale length)

Cable length

02 = 0.2 metres	15 = 1.5 metres	90 = 9.0 metres
05 = 0.5 metres	30 = 3.0 metres	99 = 10.0 metres
10 = 1.0 metres	50 = 5.0 metres	

Cable termination

A = 9-way D-type connector

F = Flying lead (unterminated cable)

L = LEMO in-line connector

S = M12 (sealed) connector

For the part numbers of the RESOLUTE Panasonic UHV variant, refer to the *RESOLUTE™ UHV absolute optical encoder* data sheet (Renishaw part no. L-9517-9530), which can be downloaded from **www.renishaw.com/resolutedownloads**.

Valid system configurations (readheads and scale) can be checked at **www.renishaw.com/epc**.

[1] For partial arc choose scale code option 'B' or 'E' as only RKLA30-S scale can be used in partial arc systems.

RESOLUTE Panasonic readhead part numbers

Rotary readheads

R A 23P B A 052 B 30 A

Series

R = RESOLUTE

Scale form

A = Angular

Serial interface

23P = Panasonic 23 bit

32P = Panasonic 32 bit

Mechanical option

B = Standard cable outlet

R = Side cable outlet

Gain option

A = Standard

Ring diameter

052 = 52 mm	150 = 150 mm	280 = 280 mm (RESA30 only)
057 = 57 mm	165 = 165 mm	300 = 300 mm
075 = 75 mm	172 = 172 mm	330 = 330 mm (RESA30 only)
100 = 100 mm	183 = 183 mm	350 = 350 mm
101 = 101 mm (RESA30 only)	200 = 200 mm	413 = 413 mm (RESA30 only)
103 = 103 mm	206 = 206 mm	417 = 417 mm
104 = 104 mm	209 = 209 mm	489 = 489 mm (RESA30 only)
115 = 115 mm	229 = 229 mm	550 = 550 mm (RESA30 only)
124 = 124 mm (RESA30 only)	255 = 255 mm	

Scale code option

B = Standard scale code

Cable length

02 = 0.2 metres	15 = 1.5 metres	90 = 9.0 metres
05 = 0.5 metres	30 = 3.0 metres	99 = 10.0 metres
10 = 1.0 metres	50 = 5.0 metres	

Cable termination

A = 9-way D-type connector

F = Flying lead (unterminated cable)

L = LEMO in-line connector

S = M12 (sealed) connector

For the part numbers of the RESOLUTE Panasonic UHV variant, refer to the *RESOLUTE™ UHV absolute optical encoder* data sheet (Renishaw part no. L-9517-9530), which can be downloaded from **www.renishaw.com/resolutedownloads**.

Valid system configurations (readheads and scale) can be checked at **www.renishaw.com/epc**.

RESOLUTE Siemens DRIVE-CLiQ readhead part numbers

Linear and partial arc readheads

R L 34D B S 001 C 30 S

Series

R = RESOLUTE

Scale form

L = Linear/partial arc [1]

Serial interface

28D = Siemens DRIVE-CLiQ 28 bit (for 50 nm resolution) [2]

34D = Siemens DRIVE-CLiQ 34 bit (for 1 nm resolution) [2]

Mechanical option

B = Standard cable outlet

R = Side cable outlet

Gain option

T = RTLA30 / RTLA30-S / RKLA30-S scales (scale code option 'B' or 'E' only)

S = RSLA30 scale (scale code option 'C' only)

E = RELA30 scale (scale code option 'C' or 'D' only)

Resolution

001 = 1 nm

050 = 50 nm

Scale code option [3]

B = RTLA30 / RTLA30-S / RKLA30-S [1] (20 mm to 10 m scale length)

C = RSLA30 (20 mm to 5 m scale length) / RELA30 (> 1.13 m to 1.7 m scale length)

D = RELA30 (20 mm to 1.13 m scale length)

E = RTLA30 / RTLA30-S / RKLA30-S [1] (> 10 m to 21 m scale length)

Cable length

02 = 0.2 metres	15 = 1.5 metres	90 = 9.0 metres
05 = 0.5 metres	30 = 3.0 metres	99 = 10.0 metres
10 = 1.0 metres	50 = 5.0 metres	

Cable termination

F = Flying lead (unterminated cable)

S = M12 (sealed) connector

For RESOLUTE Siemens DRIVE-CLiQ UHV and Functional Safety linear readhead part numbers see the relevant data sheet at **www.renishaw.com/resolutedownloads**.

Valid system configurations (readheads and scale) can be checked at **www.renishaw.com/epc**.

1 For partial arc choose scale code option 'B' or 'E' as only RKLA30-S scale can be used in partial arc systems.

2 For linear Siemens DRIVE-CLiQ variants 'Serial interface' and 'Resolution' must be selected in certain combinations.
- 28D must be selected for 50 nm resolution systems.
- 34D must be selected for 1nm resolution systems.

Other combinations are not valid.

3 The maximum scale length may be limited for some serial interfaces and resolutions; refer to 'Resolution and scale lengths' on page 7 for details.

RESOLUTE Siemens DRIVE-CLiQ readhead part numbers

Rotary readheads

R A 26D B A 052 B 30 S

Series

R = RESOLUTE

Scale form

A = Angular

Serial interface

26D = Siemens DRIVE-CLiQ 26 bit

29D = Siemens DRIVE-CLiQ 29 bit

Mechanical option

B = Standard cable outlet

R = Side cable outlet

Gain option

A = Standard

Ring diameter

052 = 52 mm	150 = 150 mm	280 = 280 mm (RESA30 only)
057 = 57 mm	165 = 165 mm	300 = 300 mm
075 = 75 mm	172 = 172 mm	330 = 330 mm (RESA30 only)
100 = 100 mm	183 = 183 mm	350 = 350 mm
101 = 101 mm (RESA30 only)	200 = 200 mm	413 = 413 mm (RESA30 only)
103 = 103 mm	206 = 206 mm	417 = 417 mm
104 = 104 mm	209 = 209 mm	489 = 489 mm (RESA30 only)
115 = 115 mm	229 = 229 mm	550 = 550 mm (RESA30 only)
124 = 124 mm (RESA30 only)	255 = 255 mm	

Scale code option

B = Standard scale code

Cable length

02 = 0.2 metres	15 = 1.5 metres	90 = 9.0 metres
05 = 0.5 metres	30 = 3.0 metres	99 = 10.0 metres
10 = 1.0 metres	50 = 5.0 metres	

Cable termination

F = Flying lead (unterminated cable)

S = M12 (sealed) connector

For RESOLUTE Siemens DRIVE-CLiQ UHV and Functional Safety rotary readhead part numbers see the relevant data sheet at **www.renishaw.com/resolutedownloads**.

Valid system configurations (readheads and scale) can be checked at **www.renishaw.com/epc**.

RESOLUTE Yaskawa readhead part numbers

Linear and partial arc readheads

R L 36Y B S 001 C 30 A

Series

R = RESOLUTE

Scale form

L = Linear/partial arc [1]

Serial interface

36Y = Yaskawa 36 bit

Mechanical option

B = Standard cable outlet

R = Side cable outlet

Gain option

T = RTLA30 / RTLA30-S / RKLA30-S scales (scale code option 'B' or 'E' only)

S = RSLA30 scale (scale code option 'C' only)

E = RELA30 scale (scale code option 'C' or 'D' only)

Resolution

001 = 1 nm

050 = 50 nm

Scale code option [2]

B = RTLA30 / RTLA30-S / RKLA30-S [1] (20 mm to 10 m scale length)

C = RSLA30 (20 mm to 5 m scale length) / RELA30 (> 1.13 m to 1.7 m scale length)

D = RELA30 (20 mm to 1.13 m scale length)

E = RTLA30 / RTLA30-S / RKLA30-S [1] (> 10 m to 21 m scale length)

Cable length

02 = 0.2 metres	15 = 1.5 metres	90 = 9.0 metres
05 = 0.5 metres	30 = 3.0 metres	99 = 10.0 metres
10 = 1.0 metres	50 = 5.0 metres	

Cable termination

A = 9-way D-type connector

F = Flying lead (unterminated cable)

L = LEMO in-line connector

S = M12 (sealed) connector

Valid system configurations (readheads and scale) can be checked at **www.renishaw.com/epc**.

1 For partial arc choose scale code option 'B' or 'E' as only RKLA30-S scale can be used in partial arc systems.

2 The maximum scale length may be limited for some serial interfaces and resolutions; refer to 'Resolution and scale lengths' on page 7 for details.

RESOLUTE Yaskawa readhead part numbers

Rotary readheads

R A 24Y B A 052 B 30 A

Series

R = RESOLUTE

Scale form

A = Angular

Serial interface

23Y = Yaskawa 23 bit [1]
24Y = Yaskawa 24 bit [2]
26Y = Yaskawa 26 bit [1]
30Y = Yaskawa 30 bit [1]

Mechanical option

B = Standard cable outlet
R = Side cable outlet

Gain option

A = Standard

Ring diameter

052 = 52 mm
057 = 57 mm
075 = 75 mm
100 = 100 mm
101 = 101 mm (RESA30 only)
103 = 103 mm
104 = 104 mm
115 = 115 mm
124 = 124 mm (RESA30 only)
150 = 150 mm
165 = 165 mm
172 = 172 mm
183 = 183 mm
200 = 200 mm
206 = 206 mm
209 = 209 mm
229 = 229 mm
255 = 255 mm
280 = 280 mm (RESA30 only)
300 = 300 mm
330 = 330 mm (RESA30 only)
350 = 350 mm
413 = 413 mm (RESA30 only)
417 = 417 mm
489 = 489 mm (RESA30 only)
550 = 550 mm (RESA30 only)

Scale code option

B = Standard scale code

Cable length

02 = 0.2 metres
05 = 0.5 metres
10 = 1.0 metres
15 = 1.5 metres
30 = 3.0 metres
50 = 5.0 metres
90 = 9.0 metres
99 = 10.0 metres

Cable termination

A = 9-way D-type connector
F = Flying lead (unterminated cable)
L = LEMO in-line connector
S = M12 (sealed) connector

[1] For fully-closed loop control.
[2] For rotary servomotors.

Valid system configurations (readheads and scale) can be checked at www.renishaw.com/epc.

RENISHAW
apply innovation™

RESOLUTE series compatible products






Advanced Diagnostic Tool ADTa-100
(A-6525-0100)


Compatible with RESOLUTE
readheads showing the ADT mark.



RELA30 self-adhesive or clip/clamp mounted ZeroMet™ spar scale



RSLA30 self-adhesive or clip/clamp mounted stainless steel spar scale



RTLA30-S self-adhesive tape scale




RTLA30 tape scale and *FASTRACK* carrier




RKLA30-S self-adhesive mastered tape scale (linear)



RKLA30-S self-adhesive tape scale (partial arc)



RESA30 stainless steel ring



REXA30 high-accuracy stainless steel ring

For more information about the ADTa-100 and the scale, refer to the relevant data sheets and installation guides which can be downloaded from www.renishaw.com/resolutedownloads.

www.renishaw.com/contact

#renishaw

+44 (0) 1453 524524 **uk@renishaw.com**

© 2010–2026 Renishaw plc. All rights reserved. This document may not be copied or reproduced in whole or in part, or transferred to any other media or language by any means, without the prior written permission of Renishaw.
RENISHAW® and the probe symbol are registered trade marks of Renishaw plc. Renishaw product names, designations and the mark 'apply innovation' are trade marks of Renishaw plc or its subsidiaries. BiSS® is a registered trademark of iC-Haus GmbH. DRIVE-CLiQ is a registered trademark of Siemens. Other brand, product or company names are trade marks of their respective owners.
WHILE CONSIDERABLE EFFORT WAS MADE TO VERIFY THE ACCURACY OF THIS DOCUMENT AT PUBLICATION, ALL WARRANTIES, CONDITIONS, REPRESENTATIONS AND LIABILITY, HOWSOEVER ARISING, ARE EXCLUDED TO THE EXTENT PERMITTED BY LAW.
RENISHAW RESERVES THE RIGHT TO MAKE CHANGES TO THIS DOCUMENT AND TO THE EQUIPMENT, AND/OR SOFTWARE AND THE SPECIFICATION DESCRIBED HEREIN WITHOUT OBLIGATION TO PROVIDE NOTICE OF SUCH CHANGES.
Renishaw plc. Registered in England and Wales. Company no: 1106260. Registered office: New Mills, Wotton-under-Edge, Glos, GL12 8JR, UK.

Part no.: L-9518-0013-01-E
Issued: 09.2026

Data sheet
L-9518-0020-01-F

RENISHAW
apply innovation™

RESOLUTE™ Functional Safety absolute optical encoder system



RESOLUTE™ Functional Safety (FS) is a true-absolute fine-pitch optical encoder system offering an impressive specification that is certified to Functional Safety standards.

Patented RESOLUTE encoder technology combines 1 nm resolution with exceptionally high speed, reading from a range of high-accuracy linear tape and spar scales or angle encoder rings.

RESOLUTE encoder systems use a single optical absolute track with a nominal pitch of 30 µm, combined with sophisticated optics. This ensures wide set-up tolerances, very low sub-divisional error and ultra-low noise (jitter), resulting in better velocity control performance and rock solid positional stability.

RESOLUTE FS encoders are for use in Functional Safety applications being certified to ISO 13849 Category 3 PLd, IEC 61508 SIL2 and IEC 61800-5-2 SIL2.

- **True-absolute non-contact optical encoder system: no batteries required**
- **ISO 13849 Category 3 PLd**
- **IEC 61508 SIL2**
- **IEC 61800-5-2 SIL2**
- **Wide set-up tolerances for quick and easy installation**
- **Resolutions to 1 nm linear or 32 bit rotary**
- **IP64 sealed readhead for high reliability in harsh environments**
- **Integral set-up LED enables easy installation and provides diagnostics at a glance**
- **Operates up to 80 °C with an integral over-temperature alarm**
- **Ultra-High Vacuum (UHV) option available**
- **Extended Temperature Range (ETR) option available for angular systems with BiSS safety enables operation down to -40 °C**
- **Compatible with a wide range of linear and rotary scales**
- **Available with BiSS Safety and Siemens DRIVE-CLiQ serial interfaces**

www.renishaw.com/resolutedownloads


#renishaw

System features

Unique single-track absolute optical scale




- Absolute position is determined immediately upon switch-on
- No battery back-up
- No yaw de-phasing unlike multiple-track systems
- Fine pitch (30 µm nominal period) optical scale for superior motion control compared to inductive, magnetic or other non-contact optical absolute encoders
- High-accuracy graduations marked directly onto tough engineering materials for outstanding metrology and reliability

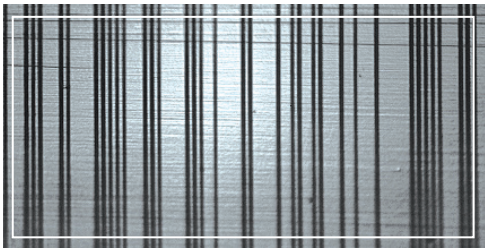


High dirt immunity

- Advanced optics and embedded surplus code means the RESOLUTE encoder system even reads dirty scale
- Absolute position can be determined in all three cases shown here; clean scale (left), grease contamination (below-left), particle contamination (below)

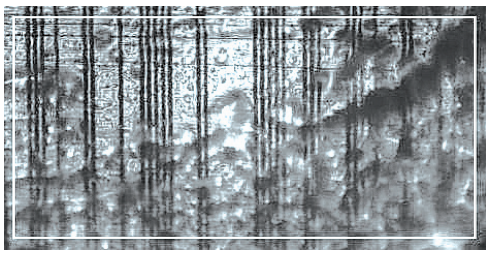



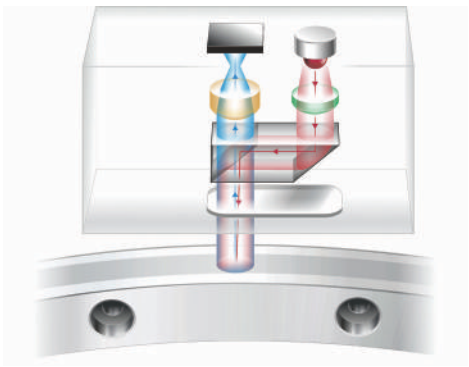

Unique detection method


- Readhead acts like an ultra-fast miniature digital camera, taking photos of a coded scale
- Photos are analysed by a high-speed digital signal processor (DSP) to determine absolute position
- Built-in position-check algorithm constantly monitors calculations for ultimate safety and reliability
- Advanced optics and position determination algorithms are designed to provide low noise (jitter < 10 nm RMS) and low sub-divisional error (SDE ±40 nm)

Optional Advanced Diagnostic Tool

The RESOLUTE encoder system is compatible with the Advanced Diagnostic Tool ADTa-100 [1] and ADT View software, which acquire detailed real-time data from the readhead to allow easy set-up, optimisation and in-field fault finding.


The intuitive software interface provides:

- Digital readout of encoder position and signal strength
- Graph of signal strength over the entire axis travel
- System configuration information

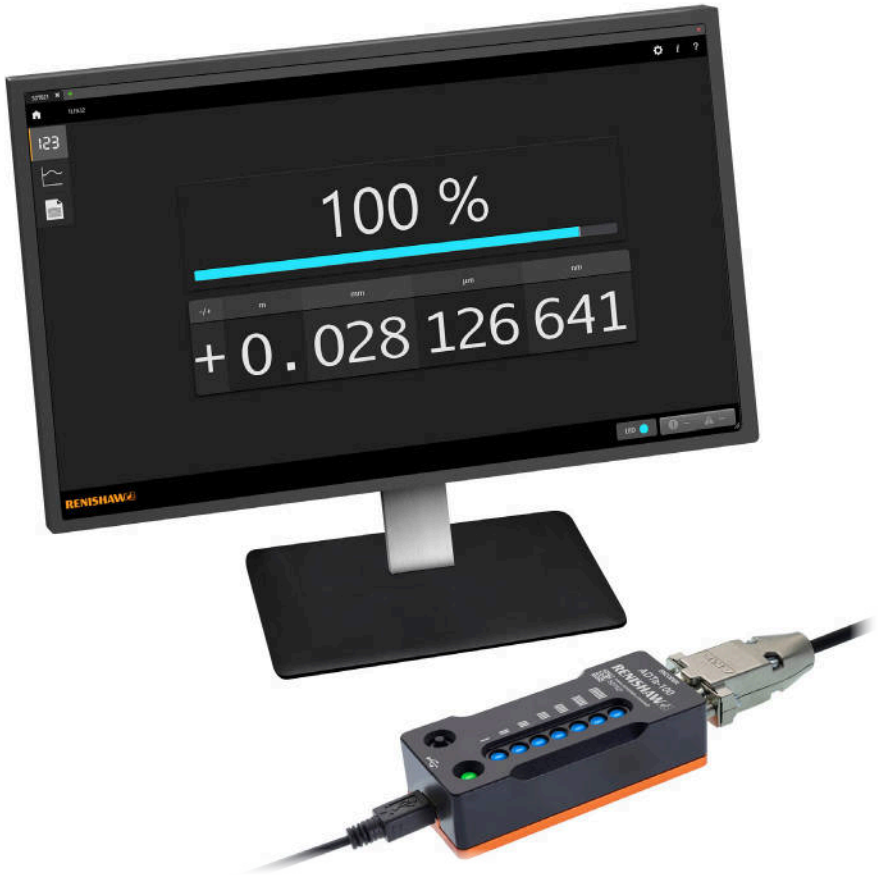

[1] ADTa-100 compatible readheads are marked with the symbol ADT

Compatible linear scales

	RTLA30-S [1]	RTLA30 (with FASTRACK ™ carrier)
	Self-adhesive mounted stainless steel tape scale	Stainless steel tape scale and self-adhesive mounted carrier
		
Form (height × width)	0.4 mm × 8 mm including adhesive	RTLA30 scale: 0.2 mm × 8 mm FASTRACK carrier: 0.4 mm × 18 mm including adhesive
Accuracy (at 20 °C)	±5 µm/m	±5 µm/m
Maximum length [2]	21 m	RTLA30 lengths up to 21 m FASTRACK carrier lengths up to 25 m
Coefficient of thermal expansion (at 20 °C)	10.1 ±0.2 µm/m/°C	10.1 ±0.2 µm/m/°C

	RELA30	RSLA30
	Self-adhesive mounted low-expansion ZeroMet™ spar scale	Self-adhesive mounted stainless steel spar scale
		
Form (height × width)	1.6 mm × 14.9 mm	1.5 mm × 14.9 mm
Accuracy (at 20 °C)	Up to 1 m : ±1 µm 1 m to 1.7 m : ±1 µm/m	Up to 1 m : ±1.5 µm 1 m to 2 m : ±2.25 µm 2 m to 3 m: ±3 µm 3 m to 5 m : ±4 µm
Maximum length [2]	1.7 m	5 m
Coefficient of thermal expansion (at 20 °C)	0.75 ±0.35 µm/m/°C	10.1 ±0.2 µm/m/°C

For more information about the linear scales refer to the relevant absolute scale data sheet which can be downloaded from **www.renishaw.com/resolutedownloads**.

[1] For RTLA30-S axis lengths > 2 m, the FASTRACK carrier with RTLA30 is recommended.

[2] The maximum scale length may be limited for some serial interfaces and resolutions; refer to 'Linear encoder system' on page 6 for details.

Compatible rotary scales

	RESA30	REXA30
	303/304 stainless steel ring	**Ultra-high accuracy 303/304 stainless steel ring**
		
Accuracy (at 20 °C)	±1.9 arc second (Typical installed accuracy for a 550 mm diameter ring) [1]	±1 arc second [2] (Total installed accuracy for ring diameters ≥ 100 mm)
Ring diameters	52 mm to 550 mm	52 mm to 417 mm
Coefficient of thermal expansion (at 20 °C)	15.5 ±0.5 µm/m/°C	15.5 ±0.5 µm/m/°C

For more information about the rotary scales refer to the relevant absolute scale data sheet which can be downloaded from **www.renishaw.com/resolutedownloads**.

1 'Typical' installations are a result of graduation and installation errors combining and, to some magnitude, cancelling.

2 Accuracy when using two RESOLUTE readheads. For the accuracy value of ring diameters < 100 mm, see *REXA30 ultra-high accuracy absolute angle encoder* data sheet (Renishaw part no. L-9517-9405).

Linear encoder system

Scale lengths and speed

The maximum scale length depends upon the serial interface, readhead resolution and the number of position bits.

The table shows the maximum scale length and speed for each system:

		Resolution		Maximum reading speed
Serial interfaces	**Position bits**	**1 nm**	**50 nm**	
BiSS Safety	28 bit	-	13.42 m	100 m/s
	36 bit	21 m	-	
Siemens DRIVE-CLiQ	28 bit	-	13.42 m	100 m/s
	34 bit	17.18 m	-	

Angle encoder system

Resolution

RESOLUTE encoders are available with a variety of resolutions dependent upon the serial interface being used.

All ring sizes are available for all serial interfaces and resolutions.

Serial interfaces	Resolution	Counts per revolution	Arc second
BiSS Safety	32 bit	4 294 967 296	≈ 0.0003
Siemens DRIVE-CLiQ	26 bit	67 108 864	≈ 0.019
	29 bit	536 870 912	≈ 0.0024

NOTE: 32 bit resolution is below the noise floor of the RESOLUTE encoder.

Accuracy

The table below shows the typical installed accuracy for RESOLUTE readheads with standard diameter RESA30 rings.

RESA30 diameter (mm)	Typical installed accuracy [1] (arc second)	RESA30 diameter (mm)	Typical installed accuracy [1] (arc second)
52	±12.7	200	±4.3
57	±11.8	206	±4.2
75	±9.5	209	±4.2
100	±7.5	229	±3.9
101	±7.5	255	±3.6
103	±7.4	280	±3.4
104	±7.3	300	±3.1
115	±6.8	330	±2.9
124	±6.3	350	±2.8
150	±5.5	413	±2.4
165	±7.0	417	±2.4
172	±5.0	489	±2.1
183	±4.7	550	±1.9

For REXA30 accuracy figures, refer to the *REXA30 ultra-high accuracy absolute angle encoder* data sheet (Renishaw part no. L-9517-9405).

Speed

The maximum speed of the RESOLUTE FS encoder system depends on the mounting method and the scale type.

For further information, refer to the *RESOLUTE™ Functional Safety installation guide and safety manual BiSS Safety encoder system* (Renishaw part no. M-9755-9109) or the *RESOLUTE™ Functional Safety installation guide and safety manual Siemens DRIVE-CLiQ encoder system* (Renishaw part no. M-9796-9134). These documents are available at **www.renishaw.com/fsencoders**.

[1] 'Typical' installations are a result of graduation and installation errors combining and, to some magnitude, cancelling.

General specifications - standard FS readheads

		BiSS Safety	Siemens DRIVE-CLiQ [1]
Power supply		5 V ±10% 1.25 W maximum (250 mA @ 5 V) [2]	Voltage and current 4.3 W maximum
		Ripple: 200 mVpp maximum @ frequency up to 500 kHz maximum	24 V power is provided by the DRIVE-CLiQ network
	Readhead over voltage protection	–12 V to +20 V	–12 V to +20 V
	Interface over voltage protection	N/A	–36 V to +36 V
Temperature	Storage (system)	–20 °C to +80 °C	–20 °C to +70 °C
	Installation (system)	+20 °C ±5 °C	+20 °C ±5 °C
	Operating (readhead)	0 °C to +80 °C	0 °C to +80 °C
	Operating (interface)	N/A	0 °C to +55 °C
Humidity		95% relative humidity (non-condensing) to IEC 60068-2-78	
Sealing	Readhead	IP64	IP64
	Interface	N/A	IP67 [3]
Environmental protection		Protection class III Pollution degree II Altitude 2000 m	
Acceleration	Operating (readhead)	500 m/s², 3 axes	
Maximum acceleration of scale with respect to readhead [4]		2000 m/s²	
Vibration	Operating (readhead)	Sinusoidal 300 m/s², 55 Hz to 2000 Hz, 3 axes	Sinusoidal 300 m/s², 55 Hz to 2000 Hz, 3 axes
	Operating (interface)	N/A	Sinusoidal 100 m/s², 55 Hz to 2000 Hz, 3 axes
Shock	Non-operating	1000 m/s², 6 ms, ½ sine, 3 axes	
Mass	Readhead	18 g	18 g
	Readhead cable	32 g/m	32 g/m
	Interface	N/A	218 g
EMC compliance		IEC 61800-5-2 Annex E	
Readhead cable		7 core, tinned and annealed copper, 28 AWG Single-shielded, outside diameter 4.7 ±0.2 mm Flex life > 40 × 10⁶ cycles at 20 mm bend radius UL recognised component	
Maximum readhead cable length		10 m	10 m (to controller or interface) (refer to manufacturer specifications for maximum cable length from interface to controller)

CAUTION: The RESOLUTE encoder system has been designed to meet the requirements of IEC 61800-5-2: Annex E second environment, but must be correctly integrated to achieve EMC compliance. In particular, attention to shielding arrangements is essential.

1 RESOLUTE Siemens DRIVE-CLiQ readheads require the Siemens DRIVE-CLiQ interface to function correctly.

2 Current consumption figures refer to a terminated RESOLUTE BiSS Safety system. BiSS Safety encoder systems must be powered from a 5 Vdc supply complying with the requirements for PELV of standard IEC 60950-1.

3 If the original termination is altered by the user or an extension cable is used, it is the responsibility of the system manufacturer to ensure the IP rating of the interface connection meets their requirements.

4 This is the worst case figure that is correct for the slowest communications clock rates. For faster clock rates, the maximum acceleration of scale with respect to the readhead can be higher. For more details, contact your local Renishaw representative.

General specifications - FS UHV readheads

		BiSS Safety	Siemens DRIVE-CLiQ [1]
Power supply		5 V ±10% 1.25 W maximum (250 mA @ 5 V) [2]	Voltage and current 4.3 W maximum
		Ripple: 200 mVpp maximum @ frequency up to 500 kHz maximum	24 V power is provided by the DRIVE-CLiQ network
	Readhead over voltage protection	–12 V to +20 V	–12 V to +20 V
	Interface over voltage protection	N/A	–36 V to +36 V
Temperature	Storage (system)	0 °C to +80 °C	0 °C to +70 °C
	Installation (system)	+20 °C ±5 °C	+20 °C ±5 °C
	Operating (readhead)	0 °C to +75 °C	0 °C to +75 °C
	Operating (interface)	N/A	0 °C to +55 °C
	Bake-out (non-operating)	+120 °C	+120 °C [3]
Humidity		95% relative humidity (non-condensing) to IEC 60068-2-78	
Sealing	Readhead	IP30	IP30
	Interface	N/A	IP67 [4]
Environmental protection		Protection class III Pollution degree II Altitude 2000 m	
Acceleration	Operating (readhead)	500 m/s², 3 axes	
Maximum acceleration of scale with respect to readhead [5]		2000 m/s²	
Vibration	Operating (readhead)	Sinusoidal 100 m/s², 55 Hz to 2000 Hz, 3 axes	Sinusoidal 100 m/s², 55 Hz to 2000 Hz, 3 axes
	Operating (interface)	N/A	Sinusoidal 100 m/s², 55 Hz to 2000 Hz, 3 axes
Shock	Non-operating	1000 m/s², 6 ms, ½ sine, 3 axes	
Mass	Readhead	19 g	19 g
	Readhead cable	19 g/m	19 g/m
	Interface	N/A	218 g
EMC compliance		IEC 61800-5-2 Annex E	
Readhead cable	Mechanical option 'U'	Silver-coated copper braided single screen FEP core insulation, over tin-plated copper wire	
	Mechanical option 'F'	Stainless steel cable braid	
Maximum readhead cable length		10 m	10 m (to controller or interface) (refer to manufacturer specifications for maximum cable length from interface to controller)

CAUTION: The RESOLUTE encoder system has been designed to meet the requirements of IEC 61800-5-2: Annex E second environment, but must be correctly integrated to achieve EMC compliance. In particular, attention to shielding arrangements is essential.

NOTE: The Siemens DRIVE-CLiQ interface is not UHV compatible and needs to be installed outside of the vacuum chamber.

1 RESOLUTE Siemens DRIVE-CLiQ readheads require the Siemens DRIVE-CLiQ interface to function correctly.

2 Current consumption figures refer to a terminated RESOLUTE BiSS Safety system. BiSS Safety encoder systems must be powered from a 5 Vdc supply complying with the requirements for PELV of standard IEC 60950-1.

3 Excluding interface (not UHV compatible).

4 If the original termination is altered by the user or an extension cable is used, it is the responsibility of the system manufacturer to ensure the IP rating of the interface connection meets their requirements.

5 This is the worst case figure that is correct for the slowest communications clock rates. For faster clock rates, the maximum acceleration of scale with respect to the readhead can be higher. For more details, contact your local Renishaw representative.

General specifications - FS ETR readheads

		BiSS Safety
Power supply		5 V ±10% 1.25 W maximum (250 mA @ 5 V) [1] Ripple: 200 mVpp maximum @ frequency up to 500 kHz maximum
	Readhead over voltage protection	–12 V to +20 V
Temperature	Storage	–40 °C to +80 °C
	Installation	+20 °C ±5 °C
	Operating	–40 °C to +80 °C
Humidity		95% relative humidity (non-condensing) to IEC 60068-2-78
Sealing		IP64
Environmental protection		Protection class III Pollution degree II Altitude 2000 m
Acceleration	Operating (–40 °C to 0 °C)	300 m/s², 3 axes
	Operating (0 °C to +80 °C)	500 m/s², 3 axes
Maximum acceleration of scale with respect to readhead [3]		2000 m/s²
Vibration	Operating	Sinusoidal 300 m/s², 55 Hz to 2000 Hz, 3 axes
Shock	Non-operating	1000 m/s², 6 ms, ½ sine, 3 axes
Mass	Readhead	18 g
	Readhead cable	32 g/m
EMC compliance		IEC 61800-5-2 Annex E
Readhead cable		7 core, tinned and annealed copper, 28 AWG Single-shielded, outside diameter 4.7 ±0.2 mm Flex life > 40 × 10⁶ cycles at 20 mm bend radius [3] UL recognised component
Maximum readhead cable length		10 m

CAUTION: The RESOLUTE encoder system has been designed to meet the requirements of IEC 61800-5-2: Annex E second environment, but must be correctly integrated to achieve EMC compliance. In particular, attention to shielding arrangements is essential.

NOTE (For ETR applications only): If using RESA30 rings, the hub should be made of a material with a CTE of between 14 and 18 µm/m/°C. If using REXA30 rings, contact your local Renishaw representative. Further environmental testing has been carried out. Contact Renishaw if you have specific requirements.

1 Current consumption figures refer to a terminated RESOLUTE BiSS Safety system. BiSS Safety encoder systems must be powered from a 5 Vdc supply complying with the requirements for PELV of standard IEC 60950-1.

2 This is the worst case figure that is correct for the slowest communications clock rates. For faster clock rates, the maximum acceleration of scale with respect to the readhead can be higher. For more details, contact your local Renishaw representative.

3 The readhead cable must be held static for operation below 0 °C.

RGA results

Test schedule


A quadrupole mass spectrometer (AccuQuad 200 RGA) was used to collect RGA data. Chamber pressure was measured with an Ion Gauge (G8130). After initial conditioning of the system, a background spectrum was recorded together with the total pressure in the test chamber.

The component was placed in the vacuum system (0.0035 m^3) which was then pumped using an KJL Lion 802 (800/s) diode ion pump and a Divac diaphragm pump at ambient temperature for 24 hours, after which a background scan and the total pressure in the test chamber were recorded again. If the system pressure was better than 5×10^{-9} mbar, the test specimen was baked at 120 °C for 48 hours. The system was then allowed to cool to ambient temperature before a final mass spectrum and total pressure measurement were taken. The final RGA scans are shown below.


NOTES:

- Exact reproduction of these results should not be expected, as RGA data depends on the condition, specification and performance of the vacuum system. However, the RGA results shows no significant contamination attributable to RESOLUTE UHV encoders and that UHV conditions can be achieved in the presence of this product.
- The Siemens DRIVE-CLiQ interface is not UHV compatible and needs to be installed outside of the vacuum chamber.


RESOLUTE UHV readhead with 1.0 m cable after bake-out (total pressure = 8×10^{-10} mbar)

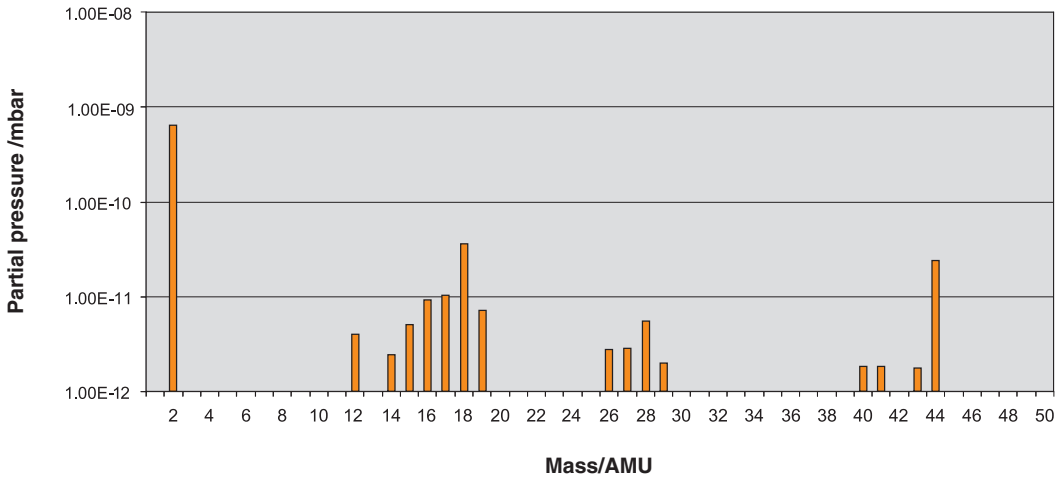


RTLA30-S linear scale (300 mm length) after bake-out (total pressure = 1.69 × 10^{-10} mbar)

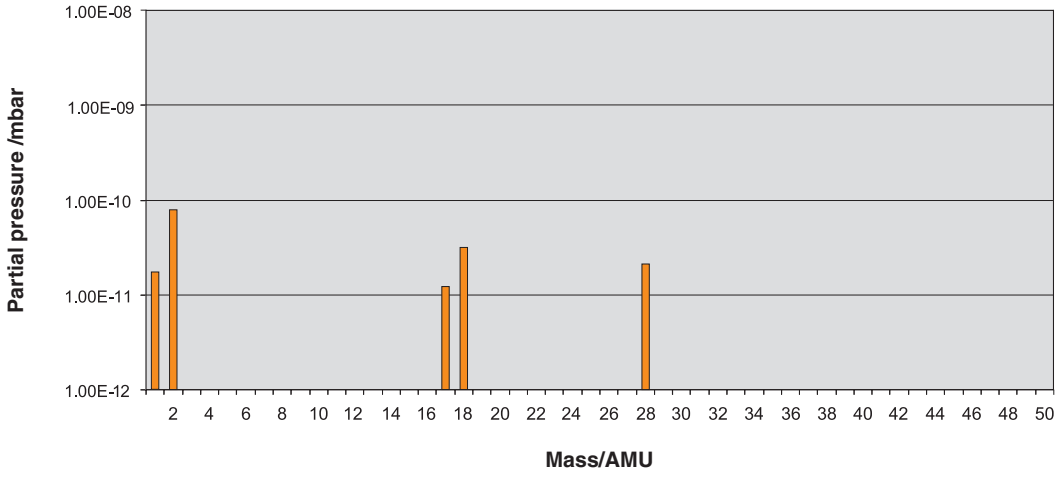

RESA30 (Ø115 mm) after bake-out (total pressure = 7.76 × 10^{-10} mbar)

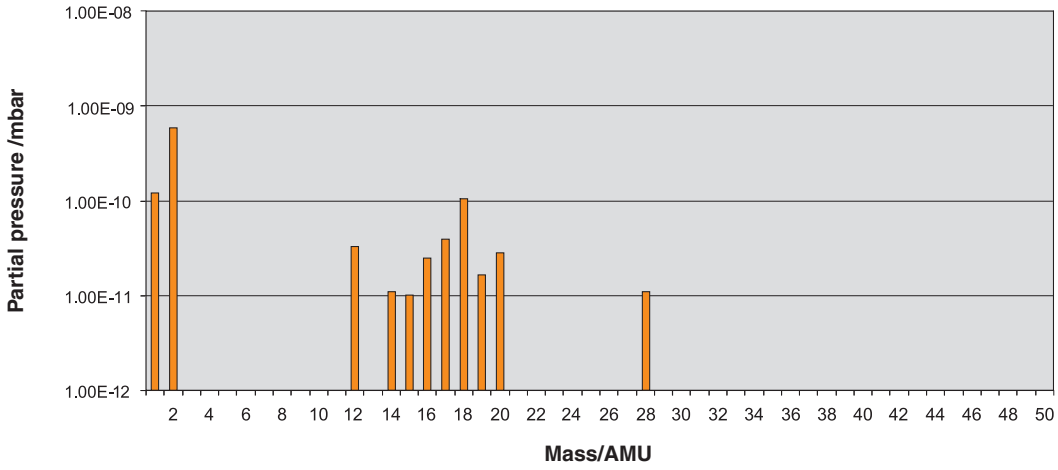

RSLA30 linear scale (180 mm length) with 2 clips and 1 clamp after bake-out (total pressure = 3.0 × 10^{-10} mbar)

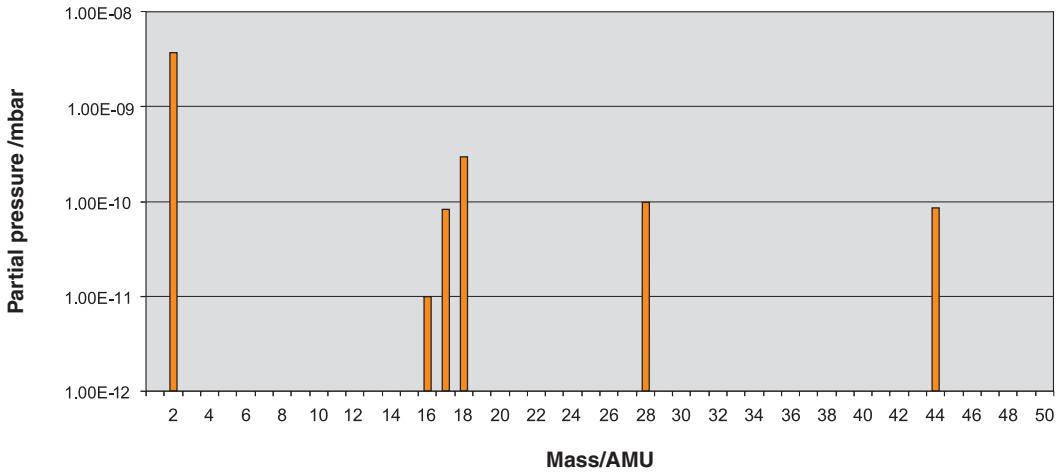

Safety sub-functions

The RESOLUTE Functional Safety BiSS Safety encoder and Siemens DRIVE-CLiQ encoder systems provide safe position data that supports the following safety sub-functions defined by IEC 61800-5-2:2016:

- Safe stop 1 (SS1) and Safe stop 2 (SS2)
- Safe operating stop (SOS)
- Safe limited acceleration (SLA) ≤ 500 m/s^2
- Safe acceleration range (SAR) ≤ 500 m/s^2
- Safe limited speed (SLS) [1] ≤ 100 m/s (≤ 50 m/s for ETR variant)
- Safe speed range (SSR) [1] ≤ 100 m/s (≤ 50 m/s for ETR variant)
- Safely limited position (SLP)
- Safely limited increment (SLI)
- Safe direction (SDI)
- Safe speed monitor (SSM) [1] ≤ 100 m/s (≤ 50 m/s for ETR variant)

The system must be installed and operated in accordance with the instructions defined by the installation guide. Failure to follow the correct use instructions and failure to heed the limitations may result in PLd and / or SIL2 not being achieved and will invalidate the functional safety certification.

NOTE: For the maximum permitted speeds for the range of ring diameters refer to the installation guides.These are available at **www.renishaw.com/fsencoders**.

[1] For further details see the *RESOLUTE™ Functional Safety installation guide and safety manual BiSS Safety encoder system (Renishaw part no. M-9755-9109) or the RESOLUTE™ Functional Safety installation guide and safety manual Siemens DRIVE-CLiQ encoder system (Renishaw part no. L-9796-9134).* These documents are available at **www.renishaw.com/fsencoders**.

Functional Safety data declaration

IEC 61508 safety data

	RESOLUTE™ Functional Safety with BiSS® Safety encoder system	RESOLUTE™ Functional Safety Siemens DRIVE-CLiQ encoder system	
		Single readhead systems	Dual readhead systems
Safety Integrity Level	2		
Random Hardware Failures (per hour)	$\lambda_S = 5.94 \times 10^{-7}$ $\lambda_D = 8.80 \times 10^{-7}$ $\lambda_{DD} = 7.92 \times 10^{-7}$ $\lambda_{DU} = 8.80 \times 10^{-8}$	$\lambda_S = 6.86 \times 10^{-7}$ $\lambda_D = 1.07 \times 10^{-6}$ $\lambda_{DD} = 9.64 \times 10^{-7}$ $\lambda_{DU} = 1.07 \times 10^{-7}$	$\lambda_S = 1.26 \times 10^{-6}$ $\lambda_D = 1.95 \times 10^{-6}$ $\lambda_{DD} = 1.76 \times 10^{-6}$ $\lambda_{DU} = 1.96 \times 10^{-7}$
PFD_{avg}	Not applicable due to continuous demand mode		
PFH (per hour)	$\lambda_{DU} = 8.80 \times 10^{-8}$	$\lambda_{DU} = 1.07 \times 10^{-7}$	$\lambda_{DU} = 1.95 \times 10^{-7}$
Architectural Constraints	Type B HFT = 0 SFF = 94%		
Hardware safety integrity compliance	Route 1H		
Systematic safety integrity compliance	Route 1S		
Systematic capability	SC2		
Demand mode	Continuous		
Proof test interval	Not required for continuous demand mode		


ISO 13849 safety data

	RESOLUTE™ Functional Safety with BiSS® Safety encoder system	RESOLUTE™ Functional Safety Siemens DRIVE-CLiQ encoder system	
		Single readhead systems	Dual readhead systems
$MTTF_D$ (years)	130	106	58
Diagnostic coverage	Medium (90%)		
Category	3		
Performance level	d		
Lifetime/Replacement limits	20 years		

RESOLUTE FS readhead installation drawing

Dimensions and tolerances in mm



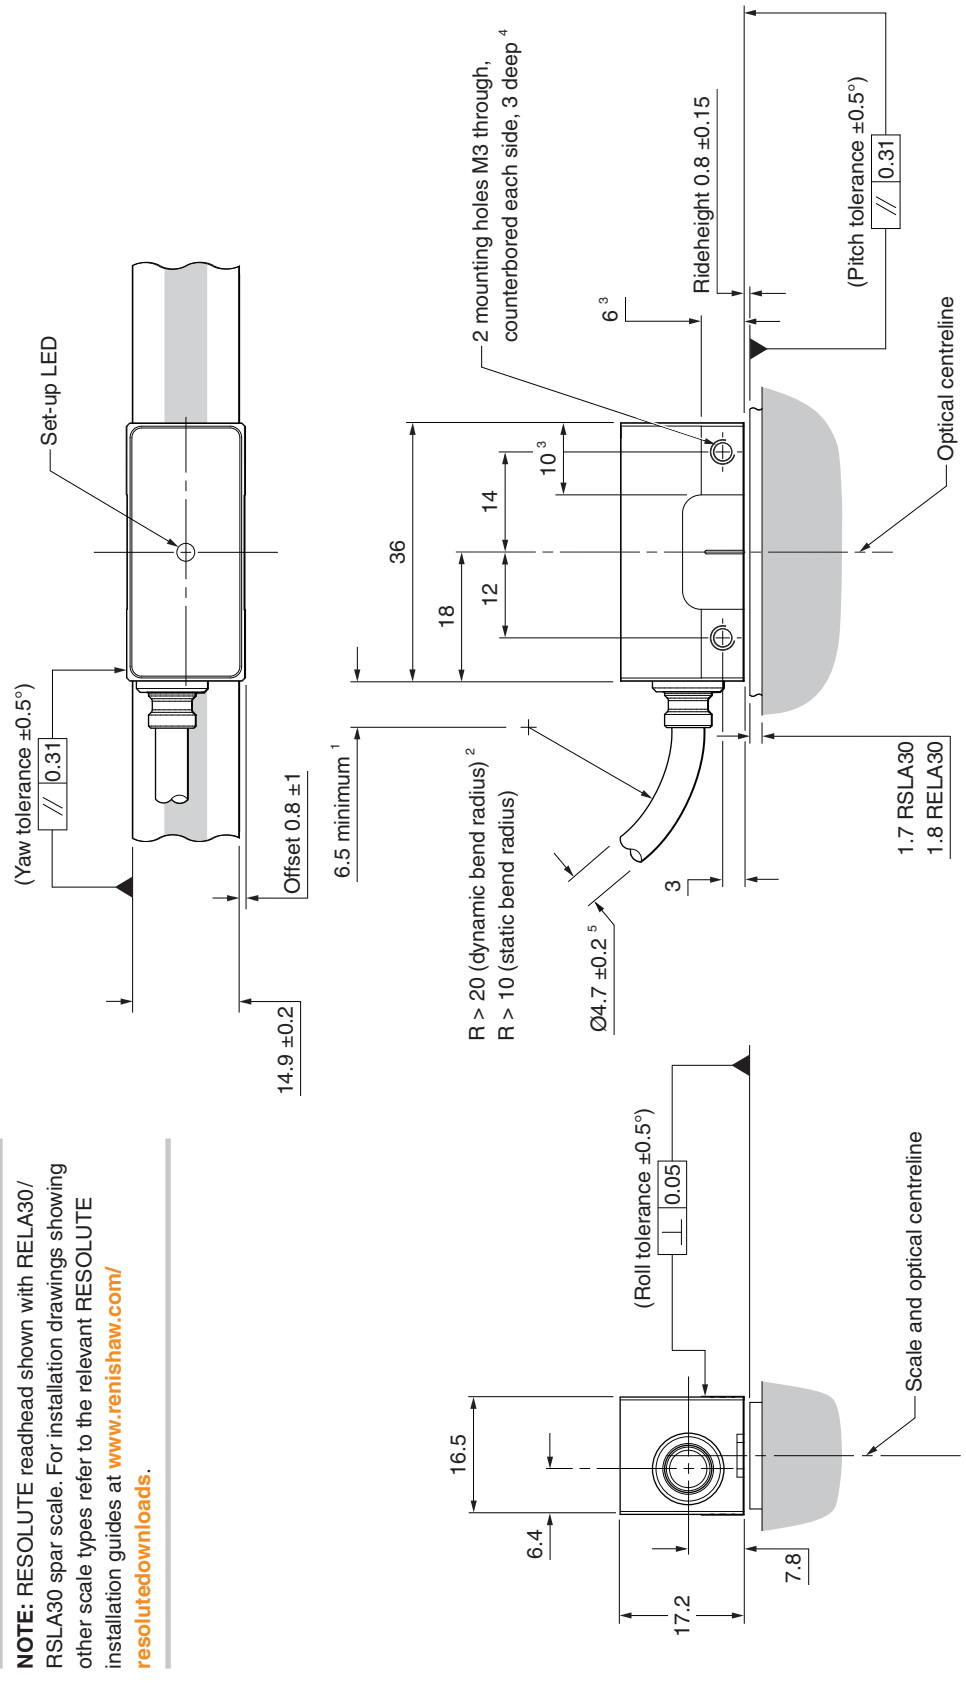

NOTE: RESOLUTE readhead shown with RELA30/RSLA30 spar scale. For installation drawings showing other scale types refer to the relevant RESOLUTE installation guides at **www.renishaw.com/resolutedownloads**.

1 5.5 minimum for FS UHV readheads.

2 UHV: The dynamic bend radius is not applicable for UHV cables. UHV cables are for static use only.


3 Extent of mounting faces.

4 The recommended thread engagement is 6 mm minimum (9 mm including counterbore) and the recommended tightening torque is 0.9 Nm to 1.1 Nm (FS standard readheads only). The recommended thread engagement is 5 mm minimum (8 mm including counterbore) and the recommended tightening torque is 0.5 Nm to 0.7 Nm (FS UHV readheads only).

5 Ø2.7 for FS UHV readheads.

RESOLUTE FS side exit cable readhead installation drawing

Dimensions and tolerances in mm

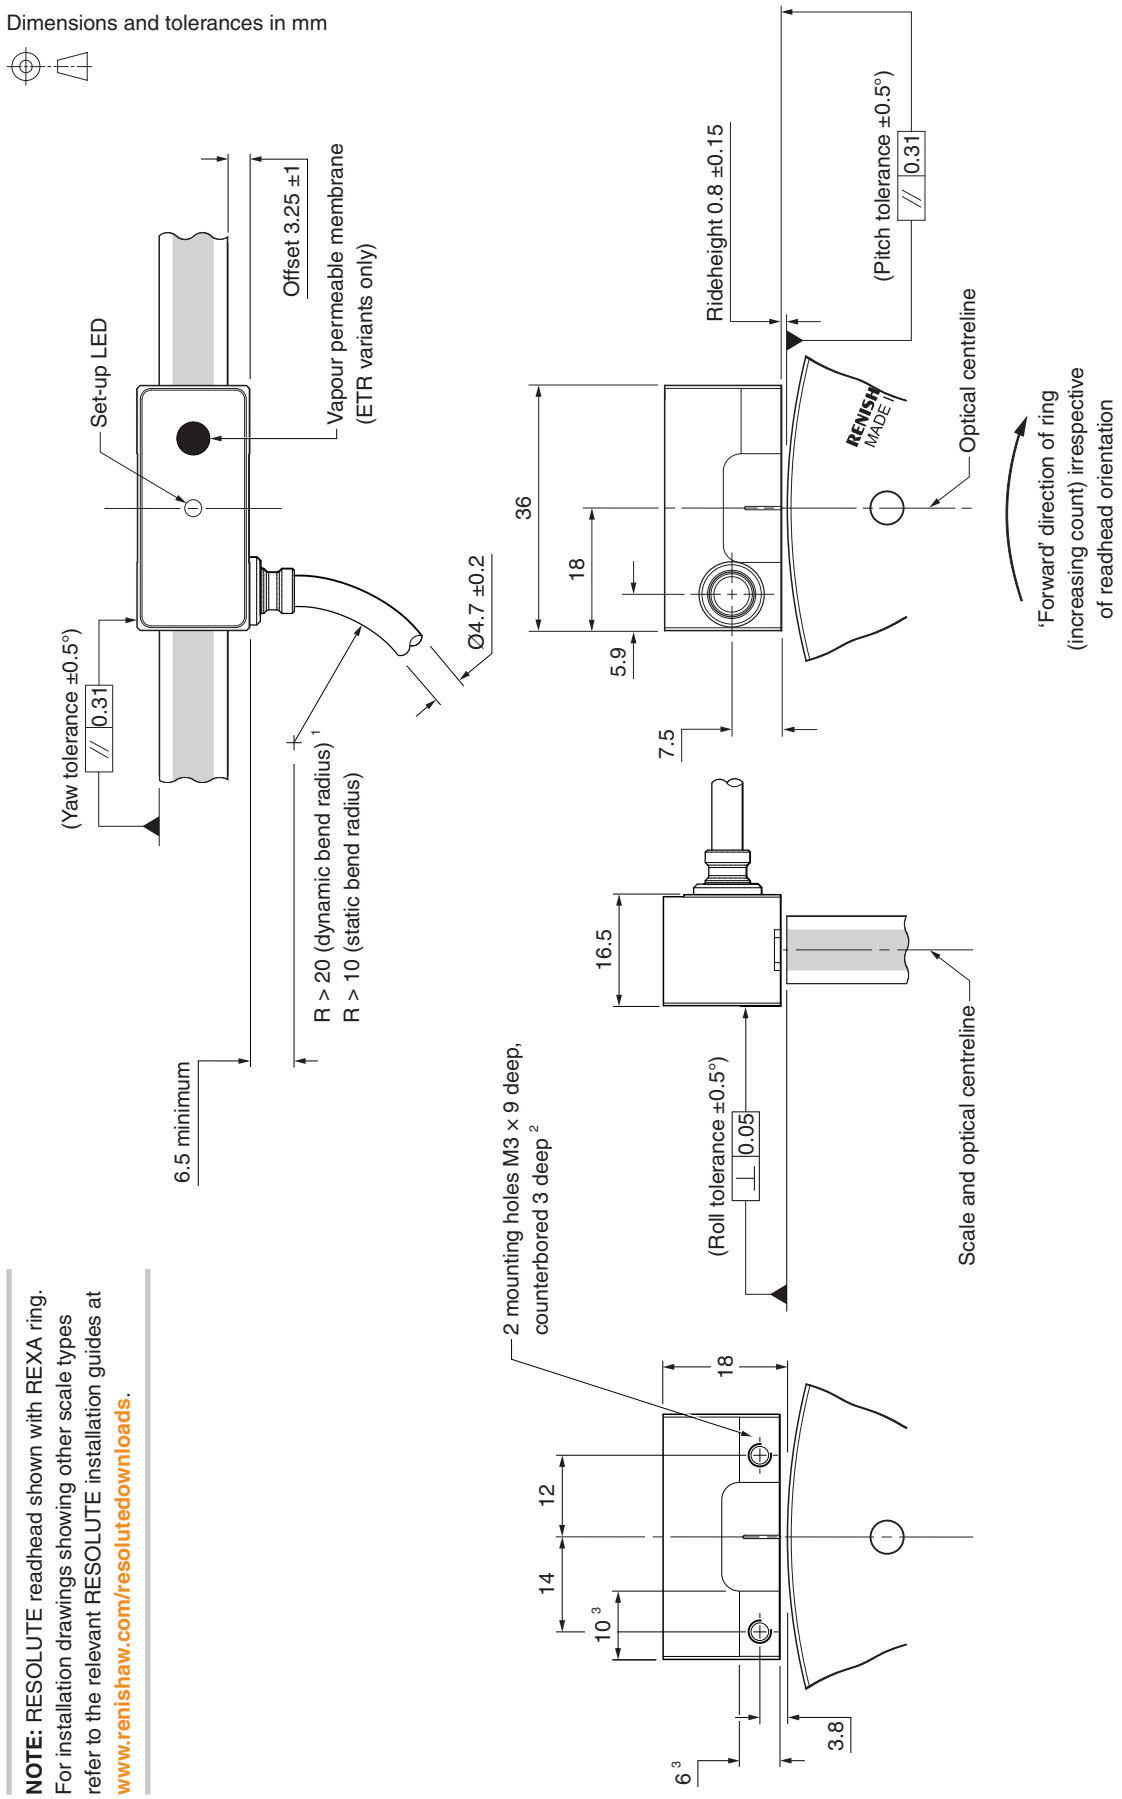

NOTE: RESOLUTE readhead shown with REXA ring. For installation drawings showing other scale types refer to the relevant RESOLUTE installation guides at www.renishaw.com/resolutedownloads.

1 ETR: The readhead cable must be held static for operation below 0 °C.


2 The recommended thread engagement is 6 mm minimum (9 mm including counterbore) and the recommended tightening torque is 0.9 Nm to 1.1 Nm.

3 Extent of mounting faces.

Siemens DRIVE-CLiQ interface drawing

Dimensions and tolerances in mm

Single readhead input (A-9796-0575)

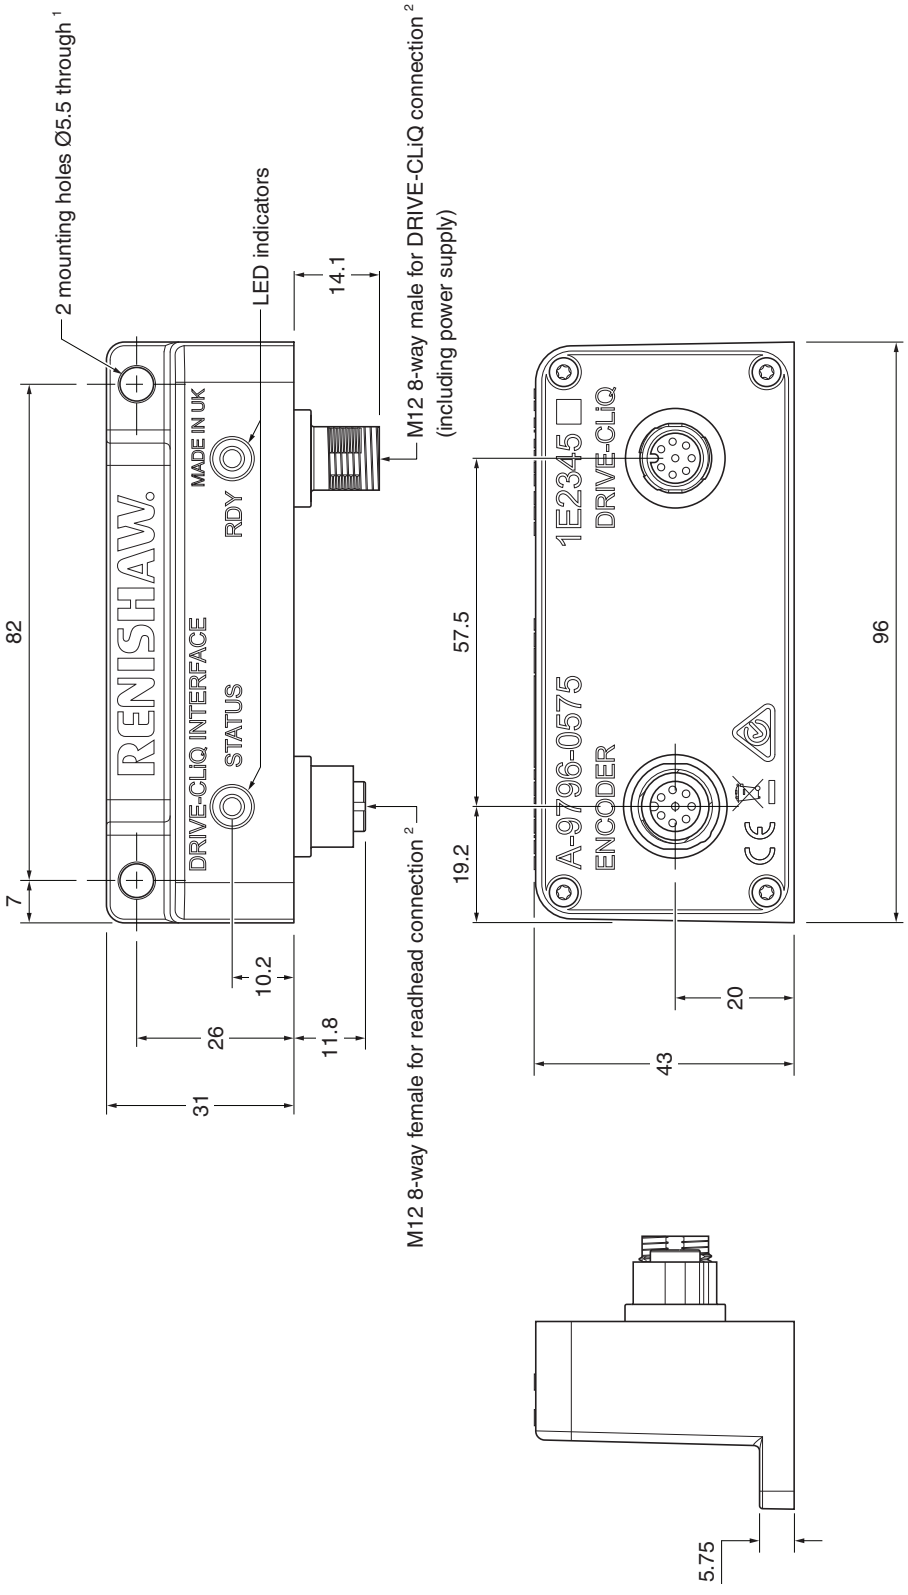

NOTE: RESOLUTE Siemens DRIVE-CLiQ readheads require the Siemens DRIVE-CLiQ interface to function correctly.


1 Screw grade: ISO 4762-M5. Maximum tightening torque 4 Nm. Recommended thread engagement ≥ 5 mm.

2 Maximum tightening torque 4 Nm.

Siemens DRIVE-CLiQ interface drawing

Dimensions and tolerances in mm

Dual readhead input (A-9796-0590)

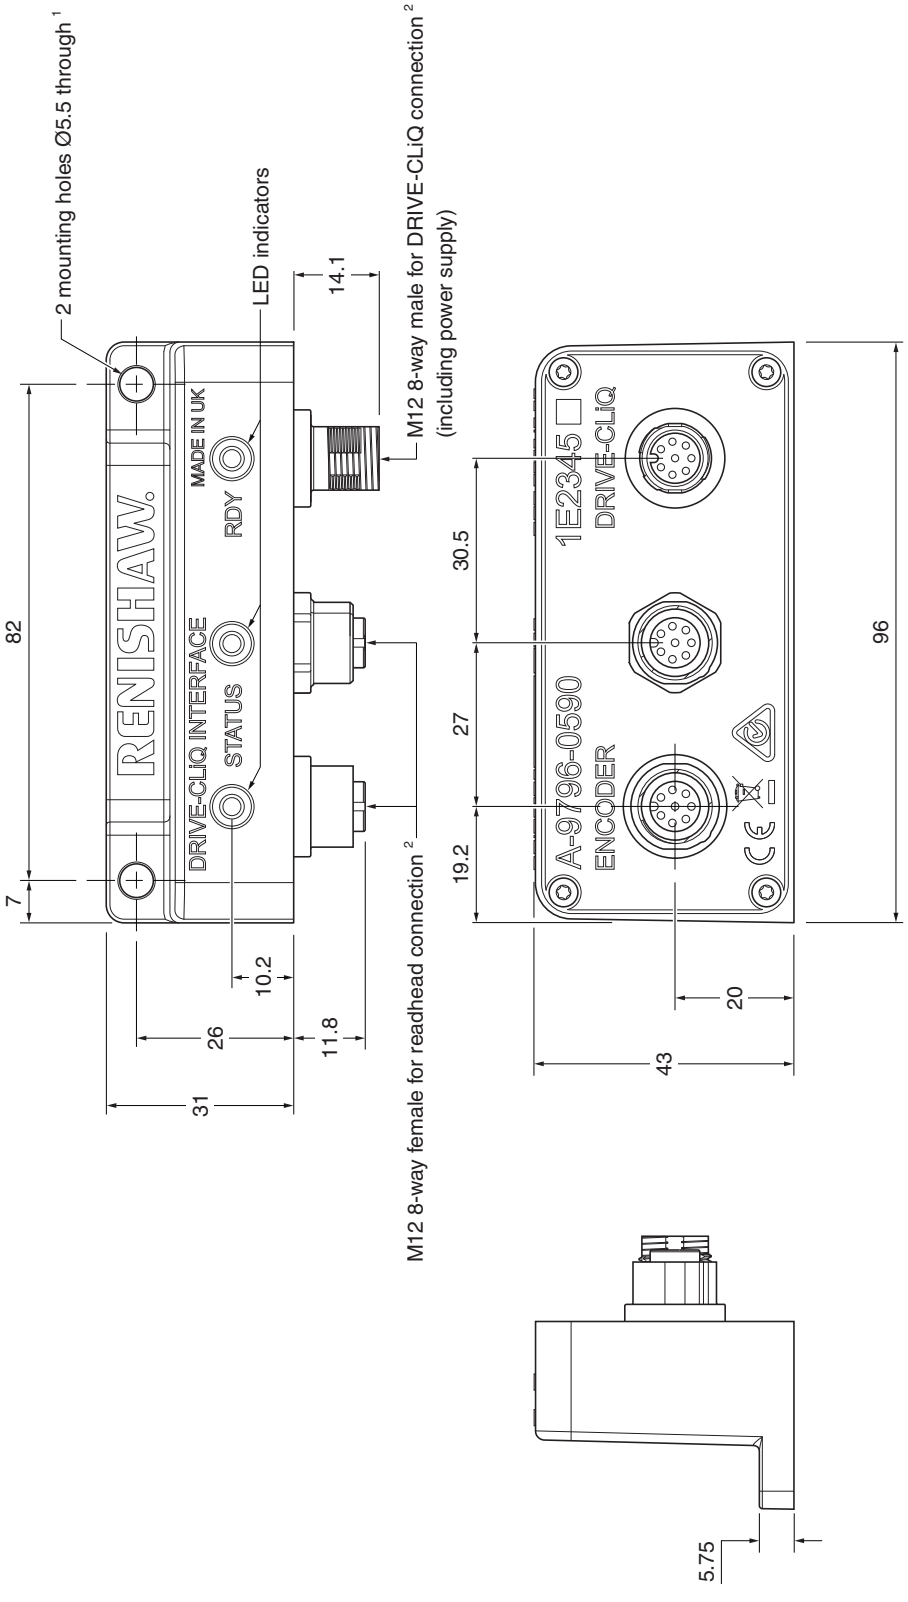

NOTE: RESOLUTE Siemens DRIVE-CLiQ readheads require the Siemens DRIVE-CLiQ interface to function correctly.

1 Screw grade: ISO 4762-M5. Maximum tightening torque 4 Nm. Recommended thread engagement ≥ 5 mm.

2 Maximum tightening torque 4 Nm.

RESOLUTE BiSS Safety readhead part numbers

Linear readheads

S L 36B B S 001 C 30 A

Series

S = RESOLUTE Functional Safety

Scale form

L = Linear

Serial interface

28B = BiSS 28 bit (select 50 nm resolution) [1]

36B = BiSS 36 bit (select 1 nm resolution) [1]

Mechanical option

B = Standard cable outlet

R = Side cable outlet

U = Ultra High Vacuum (silver coated copper braid cable)

F = Ultra High Vacuum (stainless steel cable braid)

Gain option

T = RTLA30 / RTLA30-S scales (scale code option 'B' or 'E' only)

S = RSLA30 scale (scale code option 'C' only)

E = RELA30 scale (scale code option 'C' or 'D' only)

Resolution

001 = 1 nm (select 36B serial interface) [1]

050 = 50 nm (select 28B serial interface) [1]

Scale code option

B = RTLA30 / RTLA30-S (20 mm to 10 m scale length)

C = RSLA30 (20 mm to 5 m scale length) / RELA30 (> 1.13 m to 1.7 m scale length)

D = RELA30 (20 mm to 1.13 m scale length)

E = RTLA30 / RTLA30-S (> 10 m to 21 m scale length) [2]

Cable length

02 = 0.2 metres	15 = 1.5 metres	90 = 9.0 metres
05 = 0.5 metres	30 = 3.0 metres	99 = 10.0 metres
10 = 1.0 metres	50 = 5.0 metres	

Cable termination

A = 9-way D-type connector ('B' and 'R' mechanical options only)

S = M12 (sealed) connector ('B' and 'R' mechanical options only)

F = Flying lead (unterminated cable) ('B' and 'R' mechanical options only)

V = Vacuum flying lead (unterminated cable) ('U' and 'F' mechanical options only)

Valid system configurations (readheads and scale) can be checked at **www.renishaw.com/epc**.

[1] For linear BiSS Safety variants, 'Serial interface' and 'Resolution', must be selected in certain combinations.
- 28B must be selected for 50 nm resolution systems.
- 36B must be selected for 1 nm resolution systems.

Other combinations are not valid.

[2] The maximum scale length may be limited for some serial interfaces and resolutions; refer to 'Linear encoder system' on page 6 for details.

RESOLUTE BiSS Safety readhead part numbers

Angular readheads

S A 32B B A 052 B 30 A

Series

S = RESOLUTE Functional Safety

Scale form

A = Angular

Serial interface

32B = BiSS 32 bit

Mechanical option

B = Standard cable outlet
T = Extended Temperature Range (standard cable outlet)
R = Side cable outlet
C = Extended Temperature Range (side cable outlet)
U = Ultra High Vacuum (silver coated copper braid cable)
F = Ultra High Vacuum (stainless steel cable braid)

Gain option

A = Standard

Ring diameter

052 = 52 mm
057 = 57 mm
075 = 75 mm
100 = 100 mm
101 = 101 mm (RESA30 only)
103 = 103 mm
104 = 104 mm
115 = 115 mm
124 = 124 mm (RESA30 only)
150 = 150 mm
165 = 165 mm
172 = 172 mm
183 = 183 mm
200 = 200 mm
206 = 206 mm
209 = 209 mm
229 = 229 mm
255 = 255 mm
280 = 280 mm (RESA30 only)
300 = 300 mm
330 = 330 mm (RESA30 only)
350 = 350 mm
413 = 413 mm (RESA30 only)
417 = 417 mm
489 = 489 mm (RESA30 only)
550 = 550 mm (RESA30 only)

Scale code option

B = Standard scale code

Cable length

02 = 0.2 metres
05 = 0.5 metres
10 = 1.0 metres
15 = 1.5 metres
30 = 3.0 metres
50 = 5.0 metres
90 = 9.0 metres
99 = 10.0 metres

Cable termination

A = 9-way D-type connector (‘B’, ‘R’, ‘T’, and ‘C’ mechanical options only)
S = M12 (sealed) connector (‘B’ and ‘R’ mechanical options only)
F = Flying lead (unterminated cable) (‘B’, ‘R’, ‘T’, and ‘C’ mechanical options only)
V = Vacuum flying lead (unterminated cable) (‘U’ and ‘F’ mechanical options only)

Valid system configurations (readheads and scale) can be checked at www.renishaw.com/epc.

RESOLUTE FS Siemens DRIVE-CLiQ readhead part numbers

Linear readheads

S L 34D B S 001 C 30 S

Series

S = RESOLUTE Functional Safety

Scale form

L = Linear

Serial interface

28D = Siemens DRIVE-CLiQ 28 bit (select 50 nm resolution) [1]

34D = Siemens DRIVE-CLiQ 34 bit (select 1 nm resolution) [1]

Mechanical option

B = Standard cable outlet

R = Side cable outlet

U = Ultra High Vacuum (silver coated copper braid cable)

F = Ultra High Vacuum (stainless steel cable braid)

Gain option

T = RTLA30 / RTLA30-S scales (scale code option 'B' or 'E' only)

S = RSLA30 scale (scale code option 'C' only)

E = RELA30 scale (scale code option 'C' or 'D' only)

Resolution

001 = 1 nm (select 34D serial interface)

050 = 50 nm (select 28D serial interface)

Scale code option

B = RTLA30 / RTLA30-S (20 mm to 10 m scale length)

C = RSLA30 (20 mm to 5 m scale length) / RELA30 (> 1.13 m to 1.7 m scale length)

D = RELA30 (20 mm to 1.13 m scale length)

E = RTLA30 / RTLA30-S (> 10 m to 21 m scale length) [2]

Cable length

02 = 0.2 metres	15 = 1.5 metres	90 = 9.0 metres
05 = 0.5 metres	30 = 3.0 metres	99 = 10.0 metres
10 = 1.0 metres	50 = 5.0 metres	

Cable termination

S = M12 (sealed) connector ('B' and 'R' mechanical options only)

F = Flying lead (unterminated cable) ('B' and 'R' mechanical options only)

V = Vacuum flying lead (unterminated cable) ('U' and 'F' mechanical options only)

Valid system configurations (readheads and scale) can be checked at **www.renishaw.com/epc**.

[1] For linear Siemens DRIVE-CLiQ Functional Safety variants, 'Serial interface' and 'Resolution', must be selected in certain combinations.
- 28D must be selected for 50 nm resolution systems.
- 34D must be selected for 1 nm resolution systems.

Other combinations are not valid.

[2] The maximum scale length may be limited for some serial interfaces and resolutions; refer to 'Linear encoder system' on page 6 for details.

RESOLUTE FS Siemens DRIVE-CLiQ readhead part numbers

Angular readheads

S A 29D B A 052 B 30 S

Series

S = RESOLUTE Functional Safety

Scale form

A = Angular

Serial interface

26D = Siemens DRIVE-CLiQ 26 bit

29D = Siemens DRIVE-CLiQ 29 bit

Mechanical option

B = Standard cable outlet

R = Side cable outlet

U = Ultra High Vacuum (silver coated copper braid cable)

F = Ultra High Vacuum (stainless steel cable braid)

Gain option

A = Standard

Ring diameter

052 = 52 mm
057 = 57 mm
075 = 75 mm
100 = 100 mm
101 = 101 mm (RESA30 only)
103 = 103 mm
104 = 104 mm
115 = 115 mm
124 = 124 mm (RESA30 only)
150 = 150 mm
165 = 165 mm
172 = 172 mm
183 = 183 mm
200 = 200 mm
206 = 206 mm
209 = 209 mm
229 = 229 mm
255 = 255 mm
280 = 280 mm (RESA30 only)
300 = 300 mm
330 = 330 mm (RESA30 only)
350 = 350 mm
413 = 413 mm (RESA30 only)
417 = 417 mm
489 = 489 mm (RESA30 only)
550 = 550 mm (RESA30 only)

Scale code option

B = Standard scale code

Cable length

02 = 0.2 metres
05 = 0.5 metres
10 = 1.0 metres
15 = 1.5 metres
30 = 3.0 metres
50 = 5.0 metres
90 = 9.0 metres
99 = 10.0 metres

Cable termination

S = M12 (sealed) connector (‘B’ and ‘R’ mechanical options only)

F = Flying lead (unterminated cable) (‘B’ and ‘R’ mechanical options only)

V = Vacuum flying lead (unterminated cable) (‘U’ and ‘F’ mechanical options only)

Valid system configurations (readheads and scale) can be checked at www.renishaw.com/epc.

RENISHAW
apply innovation™

RESOLUTE FS series compatible products




Advanced Diagnostic Tool ADTa-100
(A-6525-0100)


Compatible with RESOLUTE
readheads showing the **ADT** mark.



RELA30 self-adhesive mounted ZeroMet™ spar scale




RSLA30 self-adhesive mounted stainless steel spar scale




RTLA30-S self-adhesive tape scale



RTLA30 tape scale and FASTRACK carrier



RESA30 stainless steel ring



REXA30 high-accuracy stainless steel ring

Installation information can be found in the *RESOLUTE™ Functional Safety installation guide and safety manual BiSS Safety encoder system* (Renishaw part no. M-9755-9109) or the *RESOLUTE™ Functional Safety installation guide and safety manual Siemens DRIVE-CLiQ encoder system* (Renishaw part no. L-9796-9134). These documents are available at **www.renishaw.com/fsencoders**.

For more information about the ADTa-100 and the scale, refer to the relevant data sheets and installation guides which can be downloaded from **www.renishaw.com/resolutedownloads**.

www.renishaw.com/contact

#renishaw

+44 (0) 1453 524524 **uk@renishaw.com**

© 2016–2026 Renishaw plc. All rights reserved. This document may not be copied or reproduced in whole or in part, or transferred to any other media or language by any means, without the prior written permission of Renishaw.
RENISHAW® and the probe symbol are registered trade marks of Renishaw plc. Renishaw product names, designations and the mark 'apply innovation' are trade marks of Renishaw plc or its subsidiaries. BiSS® is a registered trademark of iC-Haus GmbH. DRIVE-CLiQ is a registered trademark of Siemens. Other brand, product or company names are trade marks of their respective owners.
WHILE CONSIDERABLE EFFORT WAS MADE TO VERIFY THE ACCURACY OF THIS DOCUMENT AT PUBLICATION, ALL WARRANTIES, CONDITIONS, REPRESENTATIONS AND LIABILITY, HOWSOEVER ARISING, ARE EXCLUDED TO THE EXTENT PERMITTED BY LAW.
RENISHAW RESERVES THE RIGHT TO MAKE CHANGES TO THIS DOCUMENT AND TO THE EQUIPMENT, AND/OR SOFTWARE AND THE SPECIFICATION DESCRIBED HEREIN WITHOUT OBLIGATION TO PROVIDE NOTICE OF SUCH CHANGES.
Renishaw plc. Registered in England and Wales. Company no: 1106260. Registered office: New Mills, Wotton-under-Edge, Glos, GL12 8JR, UK.

Part no.: L-9518-0020-01-F
Issued: 09.2026