ALESO RC

Bore gauge with manual recall of the mechanism
Alesametro con richiamo manuale del meccanismo

BORE GAUGES ALESAMETRI


- Mobile tip in MD (Widia) integral and with radius
- Interchangeable fixed tips with sphere MD (Widia)
- ø8mm dial gauge clamping shank
- Dial Gauge not included
- Probe Release
- Handle with insulation chamber
- Supplied with dial gauge 0,01 ø60
- Aluminum protection for the dial gauge (PROTI)

- Puntale mobile MD (Widia) integrale raggiato a richiamo
- Puntali fissi intercambiabili con sfera MD (Widia)
- Attacco per comparatore ø8 mm
- Comparatore non fornito
- Richiamo tastatore
- Impugnatura con camera di isolamento
- Di serie comparatore 0,01 ø60
- Protezione in allumio per il comparatore (PROTI)





Manual probe release
Richiamo manuale puntale

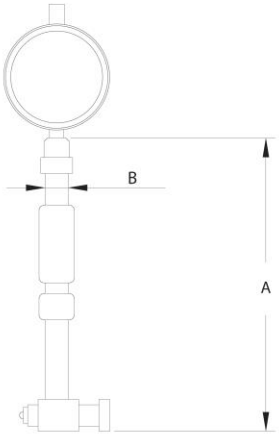

Probe r8
Puntale r8




Article	Range (mm)	Hole depth (mm)	A	B	Accuracy µm*	Repeatability µm	Code	Kg
ALESO RC 30-100	30-100	140	165	13	±1	1	D00210	0,160
ALESO RC 50-160	50-160	140	170	13	±1	1	D00215	0,190
ALESO RC 100-300	100-300	220	245	15	±1	1	D00225	0,400


*Accuracy on 0.5 mm measuring travel (excluding dial gauge)
*Precisione con escursione di 0,5 mm (escluso comparatore)

PROTECTION FOR DIAL GAUGE WITH Ø58 DIAL PROTEZIONE COMPARATORE CON QUADRANTE Ø58

PROTI 13-58



PROTI 15-58





Article	Bore gauge compatible	Code	Kg
PROTI 13-58	ALESO RC 30-100 / ALESO RC 50-160	D20010	0,080
PROTI 15-58	ALESO RC 100-300	D20015	0,080